

FLOODLIGHT SERIES

POWER	CCT	APPLICATION	SPECIFICATION	DIMMING	PRODUCT SPEC
AC 30W/50W/100W	5000K 4000K 3000K	Car Porch Car Park Hoarding Bill Board Security Light	 Dimmable  IP65 IP66  Indoor  Outdoor  External Driver  Custom Order  105° 120° Beam Angle	 DIM  PWM  TRIAC  DALI  DMX  SPI	



Floodlight 50W

Floodlight 100W

Floodlight 30W
(Non-dimming)


Items	Floodlight 30W			Floodlight 50W			Floodlight 100W		
	FB25-50MB_X	FB25-40HB_X	FB25-30HB_X	FHL050-50HDS_X	FHL050-40HDS_X	FHL050-30HDS_X	FHL100-50HDS_X	FHL100-40HDS_X	FHL100-30HDS_X
CCT	5000K	4000K	3000K	5000K	4000K	3000K	5000K	4000K	3000K
Lumen	3380 lm	3225 lm	3180 lm	3900 lm	3795 lm	3490 lm	7625 lm	7420 lm	6915 lm
Power	AC 30 W			AC 50 W			AC 100 W		
CRI	Ra >80			Ra >80			Ra >80		
Size	198 x 193 x 46 mm			280 x 112 x 204 mm			280 x 170 x 204 mm		
Weight	1.23 kg			3.08 kg			4.05 kg		
Beam Angle	105° (diffuse)			120° (diffuse)			120° (diffuse)		
IP Level	IP65			IP66			IP66		

INSTALLATION GUIDE


1 BASIC SPECIFICATION

Units : mm


FLOODLIGHT 30W

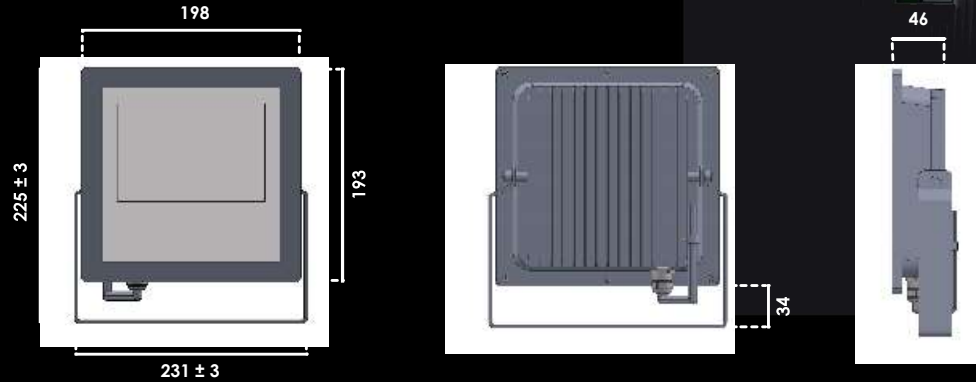

FLOODLIGHT 50W

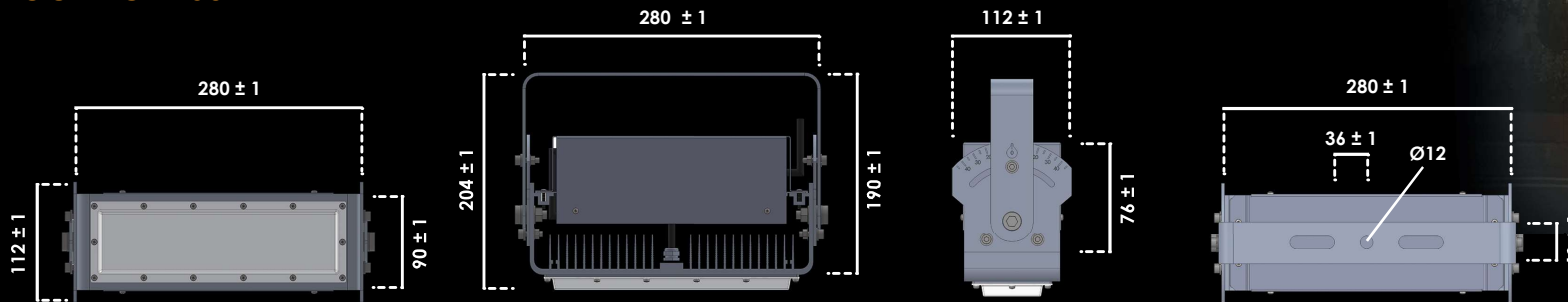

FLOODLIGHT 100W

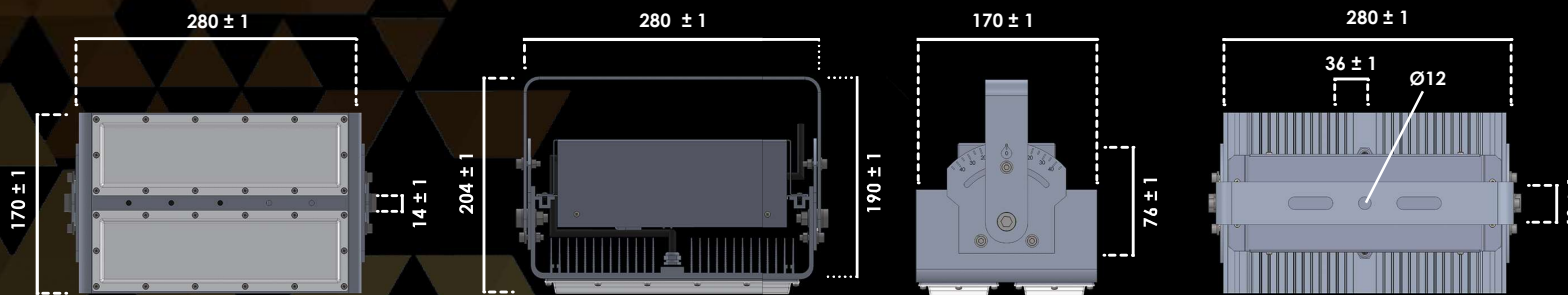

2 SIMULATION

