

PHOTOMETRIC	APPLICATION	SPECIFICATION	DIMMABLE
	Signage : Front Lit Lettering Depth : 30 ~ 60mm	Drive Mode DC 24V (CV)            Beam Angle 115°            Waterproof IP67            Dimmable            External Driver            Indoor            Outdoor            Custom Order	DIM            PWM            TRIAC            DALI            DMX            SPI

### General / Others Specification

Items	Specification
Driven Method	DC24V (Constant Voltage)
Beam Angle	115°
CRI	> Ra80
LED Module Pitch	75 ± 10 mm
LED Colour Bin	3 Steps MacAdam
Environment	Indoor / Outdoor (IP67)**
Expected LED Life Span	L <sub>70</sub> = 40,000hrs @ 25°C
Operation Temp. / Hum.	-20°C ~ 50°C / 20% ~ 85% RH
Storage Temp.	-20°C ~ 70°C



**Input Voltage**  
DC 24V


\*\* Come with 30 numbers of LED modules in one chain

\*\*1 Not Suitable for use under direct Sun application

### Order / Model Code

<b>AMM2</b>	-	□	□ □	□	-	□
<b>PRODUCT NAME</b>	-	<b>FLUX LEVEL</b>	<b>CCT</b>	<b>CRI</b>	-	<b>LED VERSION</b>
Mono Mini II	-	Nil : High	6.5 : 6500K    4.0 : 4000K 5.7 : 5700K    3.5 : 3500K 5.0 : 5000K    3.0 : 3000K 4.5 : 4500K    2.7 : 2700K	H : > 80	-	X

### Basic Specifications (Unit:mm)

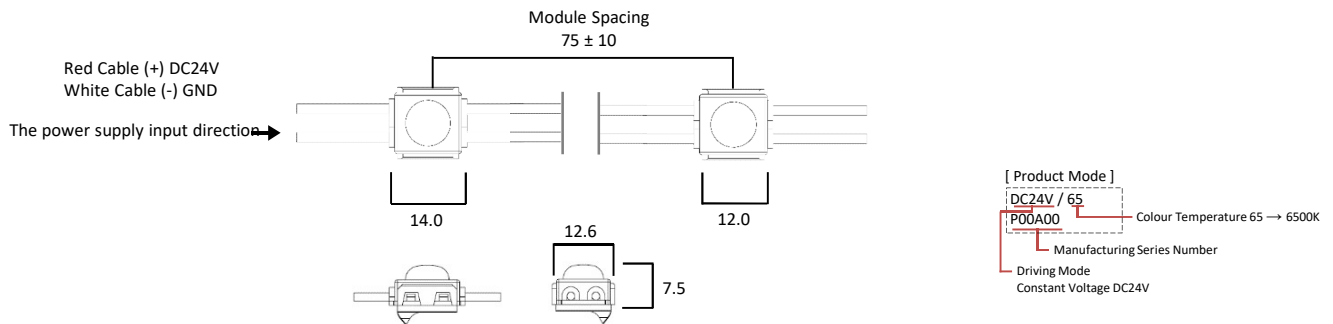


### Specification (@25°C)

Models	CCT	Lumen (lm)	CRI (Ra)	Rated Power (W)	Pitch (mm)	Beam Angle (°)	Size (L x W x H) (mm)	Ave.Weight (g)
AMM2-65H_X	6500K	30	>80	0.24	75 ± 10	115	14.0 x 12.6 x 7.5	2.20
AMM2-40H_X	4000K	30						
AMM2-30H_X	3000K	28						


\*\* Wire gauge : AWG22 x 2 single core

■ **Design Item**


View : Top

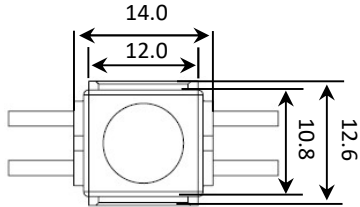


View : Bottom




View : Side

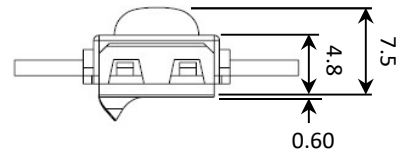

View : Side



● **Depth and Pitch**

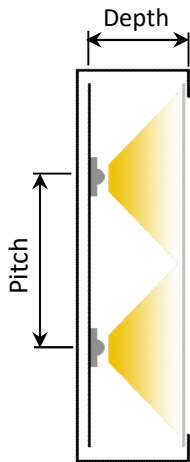

Depth	Pitch
D30	P30
D40	P40
D50	P50
D60	P60

Lettering Front Lit Pitch = Depth

■ **Wiring Method**

