

ADS2 デュオスリムII



- Suitable for backlit signs with indirect lighting 60 or more away from the wall
- Ideal for narrow spaces suitable for narrow width channel lettering
- Good for curved placement application
- Designed with wide angle beam lens
- Reduced direct light due to milk-and-a-half cover
- Dimming function is available upon request





BASIC SPECIFICATION

PART NO.



ADS2-H00H

65 : 6500K ○
40 : 4000K ●
30 : 3000K ○



○ Standard ● Customize



ADS2-H65H
6500K
80 lm



ADS2-H40H
4000K
80 lm




ADS2-H30H
3000K
77 lm

※ Luminous flux values is refer to the LED module
※ Grid 500 x 500 mm / Illuminating surface ≈ 3500 x 3000 mm


INPUT VOLTAGE	DC24V
COLOR TEMPERATURE	3000K 4000K 6500K
AVERAGE CRI	>Ra80
POWER CONSUMPTION	0.84W
BEAM ANGLE	115°
LEVEL OF PROTECTION	IP67
OPERATION TEMP./HUM.	-20°C~ +50°C / 20%~85%RH
STORAGE TEMPERATURE	-20°C~ +70°C
MODULE PITCH	150 ± 10 mm
PRODUCT PACKAGING	30 numbers in one chain

※ Customization of LED CCT and CRI is available upon request.

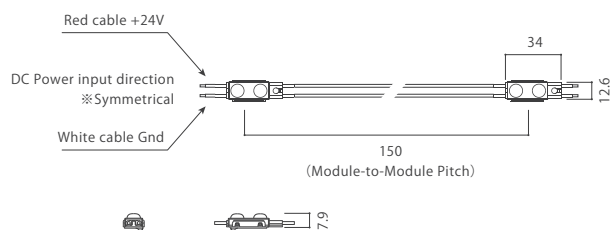


Model	CCT	Lumen	CRI	Rated Power	Beam Angle	Size (L x W x H)	Weight
ADS2-H65H_X	6500K	80 lm	>Ra80	0.84 W	115°	34.0 x 12.6 x 7.9 (mm)	5.5 g
ADS2-H40H_X	4000K	80 lm	>Ra80	0.84 W	115°	34.0 x 12.6 x 7.9 (mm)	5.5 g
ADS2-H30H_X	3000K	77 lm	>Ra80	0.84 W	115°	34.0 x 12.6 x 7.9 (mm)	5.5 g

PRODUCT CONNECTION DIAGRAM

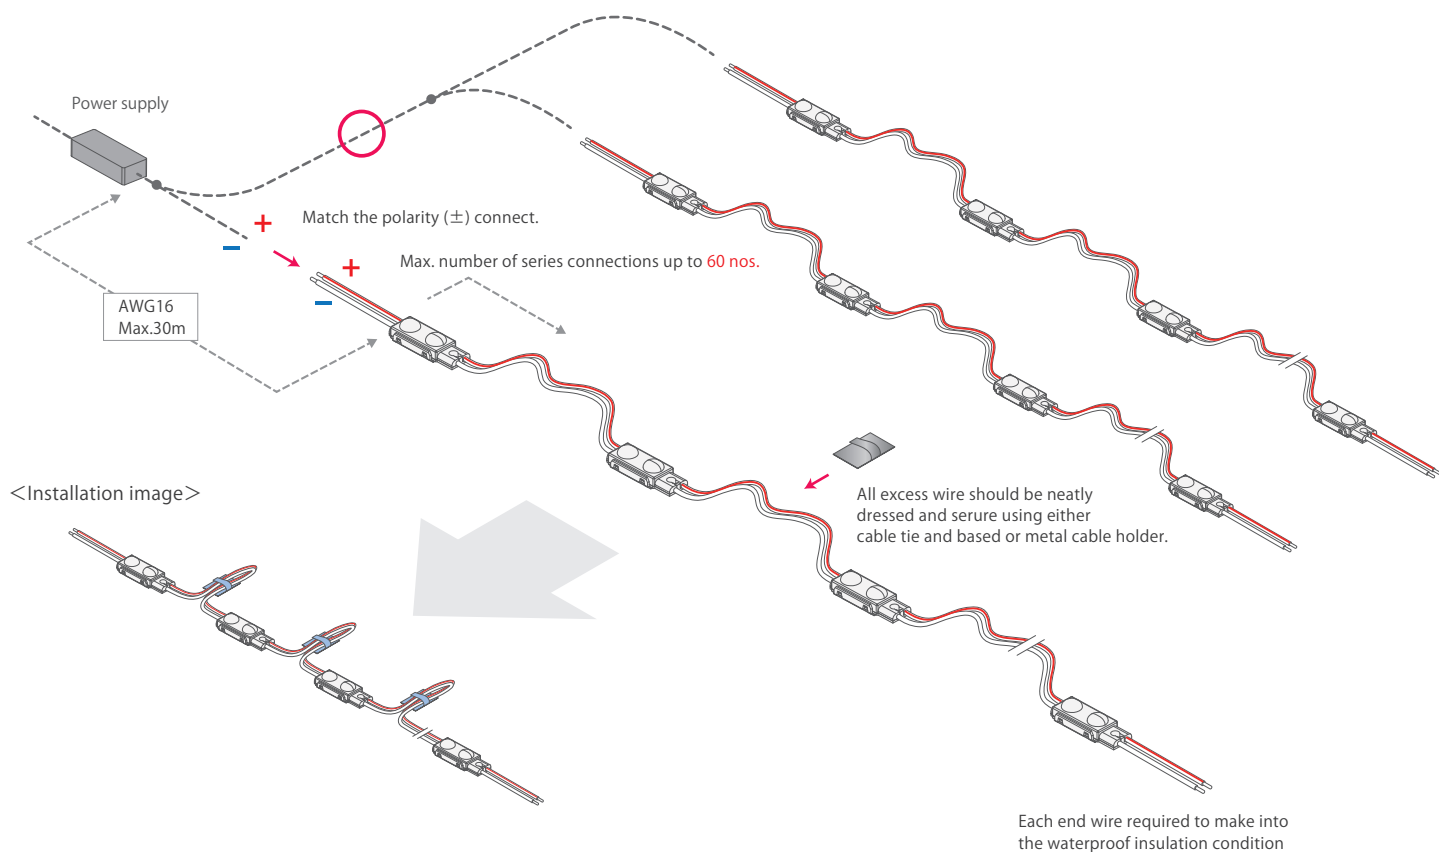

DEPTH and PITCH

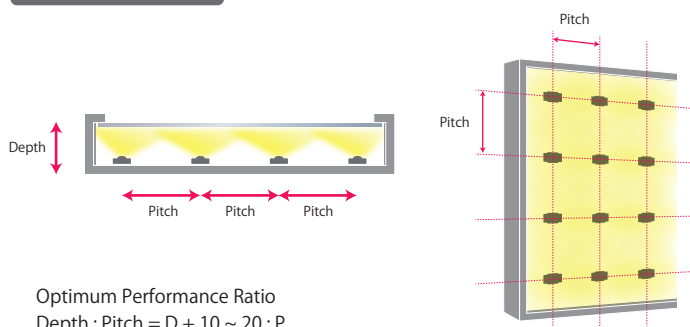

Depth - Pitch	Lumen
D60 - P80	5700 lx
D80 - P100	4100 lx
D100 - P120	3200 lx
D150 - P120	2200 lx

DIMMER

<Without dimming>



<0-10V / 1-10V dimming>

