

APN2C

ペンタナロー II CC





- Suitable for internally illuminated light sources, etc. at wall washer, spot light, double-sided of 80-300mm.
- Designed with Narrow beam angle lens
- No uneven brightness due to voltage drop
- High luminous efficiency
- Dimming function possible
- Color LED available upon request




BASIC SPECIFICATION

PART NO.	APN2C-OOH/Ma
	H : >Ra80 M : >Ra70 65 : 6500K ○ 50 : 5000K ● 40 : 4000K ○ 35 : 3500K ● 30 : 3000K ○ 27 : 2700K ○ ○ Standard ● Customize
OPERATING VOLTAGE	DC2.7~3.1V
INPUT CURRENT	700mA
COLOR TEMPERATURE	2700K 3000K 4000K 6500K
AVERAGE CRI	>Ra70 / >Ra80 [6500K] [Other]
POWER CONSUMPTION	2.10W
BEAM ANGLE	11°
LEVEL OF PROTECTION	IP44
OPERATION TEMP./HUM.	-20°C~ +50°C / 20%~85%RH
STORAGE TEMPERATURE	-20°C~ +70°C
MODULE PITCH	130 ± 10 mm
PRODUCT PACKAGING	10 numbers in one chain


※ Customization of LED CCT and CRI is available upon request.

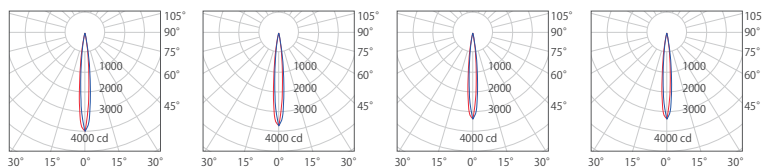


APN2C-65H
6500K
295 lm



APN2C-40H
4000K
275 lm




APN2C-30H
3000K
260 lm



APN2C-27H
2700K
250 lm

※ Luminous flux values is refer to the LED module
 ※ Grid 500 x 500 mm / Illuminating surface ≈ 3500 x 3000 mm

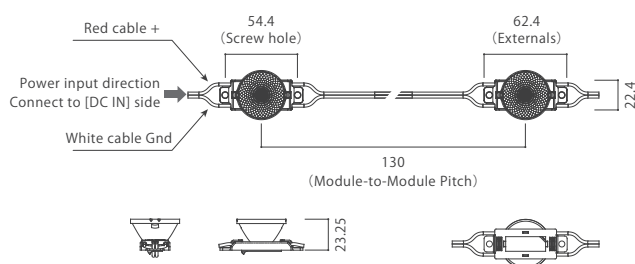

Model	CCT	Lumen	CRI	Input Current	Rated Power	Beam Angle	Size (L x W x H)	Weight
APN2C-65M_X	6500K	295 lm	>Ra80	700 mA	2.10 W	11°	62.4 x 37.0 x 23.3 (mm)	21 g
APN2C-40H_X	4000K	275 lm	>Ra80	700 mA	2.10 W	11°	62.4 x 37.0 x 23.3 (mm)	21 g
APN2C-30H_X	3000K	260 lm	>Ra80	700 mA	2.10 W	11°	62.4 x 37.0 x 23.3 (mm)	21 g
APN2C-27H_X	2700K	250 lm	>Ra80	700 mA	2.10 W	11°	62.4 x 37.0 x 23.3 (mm)	21 g

PRODUCT CONNECTION DIAGRAM

