

APW1V12

ペンタワイドRGB



- Suitable for membranes colour lighting effect
- Suitable for the 150-200 depth of application
- 16.77 million full-colour colours changing effect
- Designed with wide-angle beam lens






BASIC SPECIFICATION

PART NO.	APW1V12-RGB
INPUT VOLTAGE	DC12V
COLOR TEMPERATURE	Full colour 16.77 million colours
POWER CONSUMPTION	0.72W @ White
BEAM ANGLE	155°
LEVEL OF PROTECTION	IP67
OPERATION TEMP./HUM.	-20°C ~ +50°C / 20%~85%RH
STORAGE TEMPERATURE	-20°C ~ +70°C
MODULE PITCH	300 ± 10 mm
PRODUCT PACKAGING	15 numbers in one chain

※ Customization of the module pitch, power on etc upon request


Color Code White Red Green Blue
+24V Red Green Blue

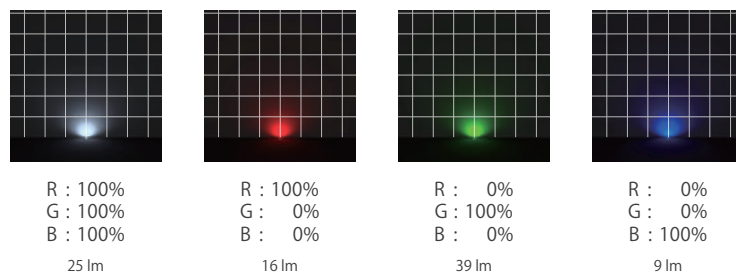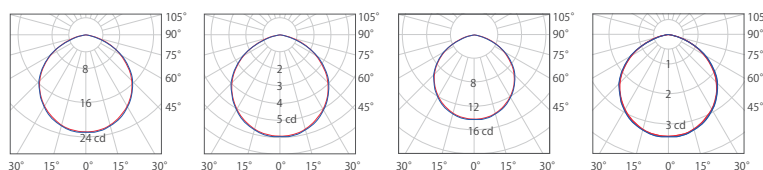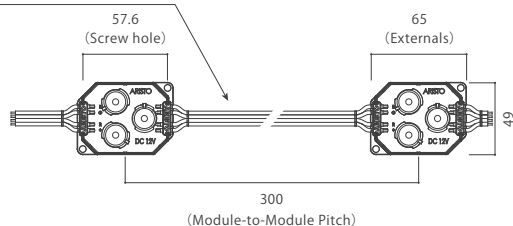

※ Luminous flux values is refer to the LED module
 ※ Grid 500 x 500 mm / Illuminating surface ≈ 3500 x 3000 mm

Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
APW1V12-RGB_X	RGB 3in1	25 lm @ White	0.72 W @ White	155°	65.0 x 49.0 x 7.0 (mm)	24 g

PRODUCT CONNECTION DIAGRAM

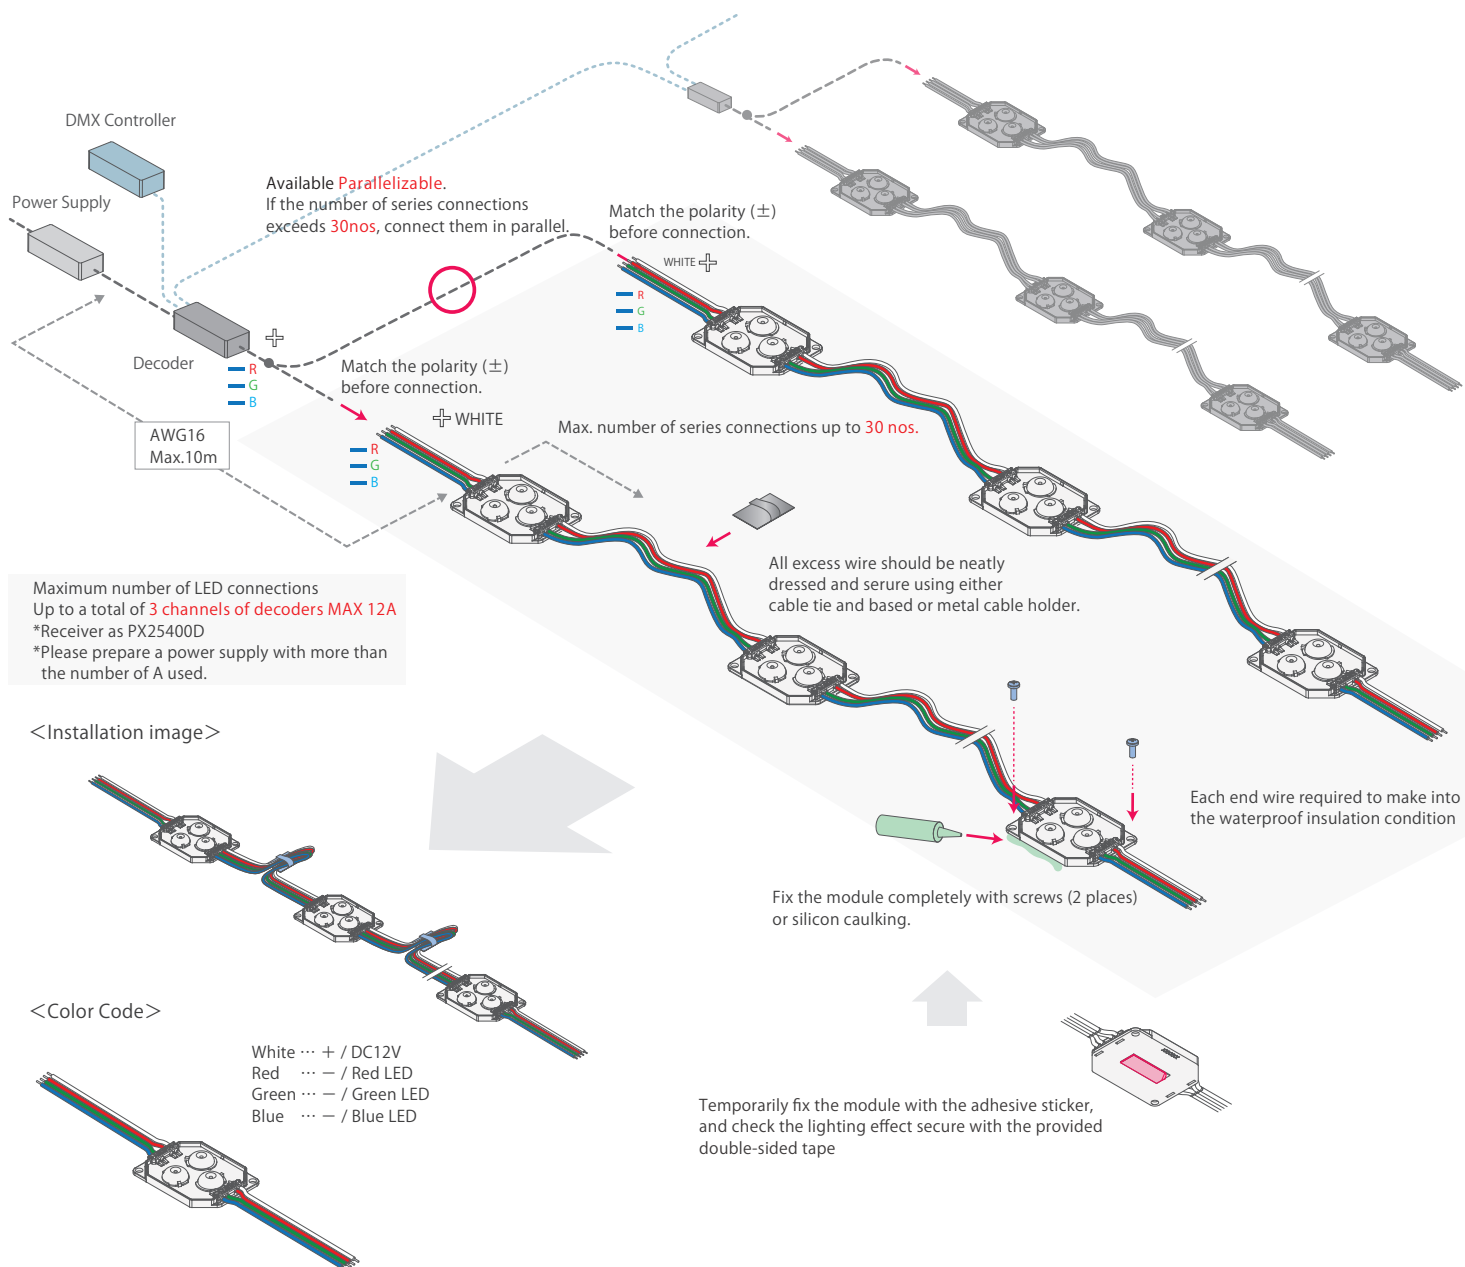

SYSTEM

<DMX Dimming>

