

SBL1 シームレスビーム L



- Constant voltage DC24V driven method.
- Seamless effect, less glare and high colour rendering index.
- Ideal for indoor borders, indirect lighting and under-shelf lighting.
- Seamless when 2 light source connected side-by-side.
- Dimming function is available.
- Wire harness can be stored inside the Metal Clip H.
- Waterproof connectors for easy connection.
- Other CCT available upon request.



Clip H is designed to be stored internally
Waterproof connector

BASIC SPECIFICATION

PART NO.

SBL1-△△HOOE

○ Standard ● Customize


12 : 4ft (1140 mm)	65 : 6500K●
10 : 1m(978mm)	50 : 5000K○
09 : 3ft (856mm)	40 : 4000K●
06 : 2ft (571mm)	35 : 3500K●
03 : 1ft (287mm)	30 : 3000K○
	27 : 2700K●

INPUT VOLTAGE	DC24V
COLOR TEMPERATURE	2700K 3000K 3500K 4000K 5000K
AVERAGE CRI	>Ra90
POWER CONSUMPTION	15.32W / 13.13W / 11.49W / 7.66W / 3.83W [4ft] [1m] [3ft] [2ft] [1ft]
BEAM ANGLE	115°
LEVEL OF PROTECTION	IP20 (Indoor)
OPERATION TEMP./HUM.	-20°C ~ +50°C / 20°C ~ 85%RH
STORAGE TEMPERATURE	-20°C ~ +70°C

■ LIST of AVAILABLE PRODUCTION LENGTHS

PART NO. :	LENGTH	POWER	Standard	Customize
004 :	44 mm	0.55W		
008 :	84 mm	1.09W		
012 :	125 mm	1.64W		
016 :	165 mm	2.19W		
021 :	206 mm	2.74W		
025 :	247 mm	3.28W		
03 :	287 mm	3.83W		
033 :	328 mm	4.38W		
037 :	368 mm	4.92W		
04 :	409 mm	5.47W		
045 :	450 mm	6.02W		
049 :	490 mm	6.57W		
053 :	531 mm	7.11W		
06 :	571 mm	7.66W		
062 :	612 mm	8.21W		
065 :	653 mm	8.75W		
069 :	693 mm	9.30W		
073 :	734 mm	9.85W		
077 :	774 mm	10.39W		
082 :	815 mm	10.94W		
09 :	856 mm	11.49W		
096 :	896 mm	12.04W		
097 :	937 mm	12.58W		
10 :	978 mm	13.13W		
102 :	1018 mm	13.68W		
106 :	1059 mm	14.22W		
109 :	1099 mm	14.77W		
12 :	1140 mm	15.32W		

※ In addition to the above, lengths of 1200 and over can be produced. Please enquire for details.
※ Please enquire about suggested retail prices for custom-made colour temperatures.

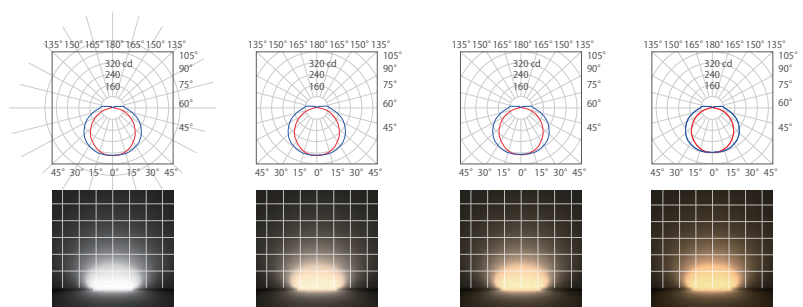

SBL1-△△H50E

5000K

1360 / 1165 / 1020 / 680 / 340 lm

SBL1-△△H40E

4000K

1360 / 1165 / 1020 / 680 / 340 lm

SBL1-△△H35E


3500K

1312 / 1125 / 984 / 656 / 328 lm

SBL1-△△H30E

3000K

1280 / 1100 / 960 / 640 / 320 lm




SBL1-△△H27E

2700K

1200 / 1030 / 900 / 600 / 300 lm

※ 4ft polar light distribution curve.
※ Luminous flux for 1ft / 2ft / 3ft / 4ft.
※ Grid 500 x 500 mm / Illuminating surface ≈ 3500 x 3000 mm

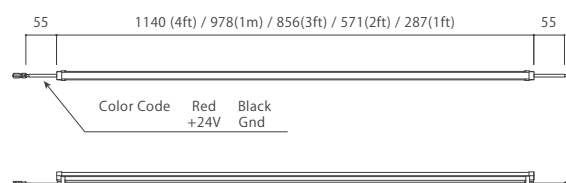

17.4
23.2
31.6
23.6
Metal clip H
(M4 screws used)
Metal clip L
(M4 screws used)

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
High Flux (13.13 W/m)	SBL1-03H50E_X	5000K	340 lm	3.83 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03H40E_X	4000K	340 lm	3.83 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03H35E_X	3500K	328 lm	3.83 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03H30E_X	3000K	320 lm	3.83 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03H27E_X	2700K	300 lm	3.83 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-06H50E_X	5000K	680 lm	7.66 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06H40E_X	4000K	680 lm	7.66 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06H35E_X	3500K	656 lm	7.66 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06H30E_X	3000K	640 lm	7.66 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06H27E_X	2700K	600 lm	7.66 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-09H50E_X	5000K	1020 lm	11.49 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09H40E_X	4000K	1020 lm	11.49 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09H35E_X	3500K	984 lm	11.49 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09H30E_X	3000K	960 lm	11.49 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09H27E_X	2700K	900 lm	11.49 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-10H50E_X	5000K	1165 lm	13.13 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10H40E_X	4000K	1165 lm	13.13 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10H35E_X	3500K	1125 lm	13.13 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10H30E_X	3000K	1100 lm	13.13 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10H27E_X	2700K	1030 lm	13.13 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-12H50E_X	5000K	1360 lm	15.32 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12H40E_X	4000K	1360 lm	15.32 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12H35E_X	3500K	1312 lm	15.32 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12H30E_X	3000K	1280 lm	15.32 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12H27E_X	2700K	1200 lm	15.32 W	140°	1140 x 17.0 x 20.1 (mm)	225 g


	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Low Flux (8.97 W/m)	SBL1-03L50E_X	5000K	240 lm	2.62 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03L40E_X	4000K	240 lm	2.62 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03L35E_X	3500K	232 lm	2.62 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03L30E_X	3000K	230 lm	2.62 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03L27E_X	2700K	220 lm	2.62 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-06L50E_X	5000K	480 lm	5.24 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06L40E_X	4000K	480 lm	5.24 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06L35E_X	3500K	464 lm	5.24 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06L30E_X	3000K	460 lm	5.24 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06L27E_X	2700K	440 lm	5.24 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-09L50E_X	5000K	720 lm	7.86 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09L40E_X	4000K	720 lm	7.86 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09L35E_X	3500K	696 lm	7.86 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09L30E_X	3000K	690 lm	7.86 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09L27E_X	2700K	660 lm	7.86 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-10L50E_X	5000K	825 lm	8.97 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10L40E_X	4000K	825 lm	8.97 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10L35E_X	3500K	795 lm	8.97 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10L30E_X	3000K	790 lm	8.97 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10L27E_X	2700K	755 lm	8.97 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-12L50E_X	5000K	960 lm	10.48 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12L40E_X	4000K	960 lm	10.48 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12L35E_X	3500K	928 lm	10.48 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12L30E_X	3000K	920 lm	10.48 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12L27E_X	2700K	880 lm	10.48 W	140°	1140 x 17.0 x 20.1 (mm)	225 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Mid Low Flux (7.50 W/m)	SBL1-03ML50E_X	5000K	200 lm	2.19 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03ML40E_X	4000K	200 lm	2.19 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03ML35E_X	3500K	194 lm	2.19 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03ML30E_X	3000K	192 lm	2.19 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03ML27E_X	2700K	184 lm	2.19 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-06ML50E_X	5000K	400 lm	4.38 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06ML40E_X	4000K	400 lm	4.38 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06ML35E_X	3500K	388 lm	4.38 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06ML30E_X	3000K	384 lm	4.38 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06ML27E_X	2700K	368 lm	4.38 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-09ML50E_X	5000K	600 lm	6.57 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09ML40E_X	4000K	600 lm	6.57 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09ML35E_X	3500K	582 lm	6.57 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09ML30E_X	3000K	576 lm	6.57 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09ML27E_X	2700K	552 lm	6.57 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-10ML50E_X	5000K	655 lm	7.50 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10ML40E_X	4000K	655 lm	7.50 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10ML35E_X	3500K	665 lm	7.50 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10ML30E_X	3000K	660 lm	7.50 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10ML27E_X	2700K	630 lm	7.50 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-12ML50E_X	5000K	800 lm	8.76 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12ML40E_X	4000K	800 lm	8.76 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12ML35E_X	3500K	776 lm	8.76 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12ML30E_X	3000K	768 lm	8.76 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12ML27E_X	2700K	732 lm	8.76 W	140°	1140 x 17.0 x 20.1 (mm)	225 g


	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Very Low Flux (6.00 W/m)	SBL1-03VL50E_X	5000K	160 lm	1.75 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03VL40E_X	4000K	160 lm	1.75 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03VL35E_X	3500K	153 lm	1.75 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03VL30E_X	3000K	150 lm	1.75 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03VL27E_X	2700K	140 lm	1.75 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-06VL50E_X	5000K	320 lm	3.50 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06VL40E_X	4000K	320 lm	3.50 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06VL35E_X	3500K	306 lm	3.50 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06VL30E_X	3000K	300 lm	3.50 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06VL27E_X	2700K	280 lm	3.50 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-09VL50E_X	5000K	480 lm	5.25 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09VL40E_X	4000K	480 lm	5.25 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09VL35E_X	3500K	459 lm	5.25 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09VL30E_X	3000K	450 lm	5.25 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09VL27E_X	2700K	420 lm	5.25 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-10VL50E_X	5000K	550 lm	6.00 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10VL40E_X	4000K	550 lm	6.00 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10VL35E_X	3500K	525 lm	6.00 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10VL30E_X	3000K	515 lm	6.00 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10VL27E_X	2700K	480 lm	6.00 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-12VL50E_X	5000K	640 lm	7.00 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12VL40E_X	4000K	640 lm	7.00 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12VL35E_X	3500K	612 lm	7.00 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12VL30E_X	3000K	600 lm	7.00 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12VL27E_X	2700K	560 lm	7.00 W	140°	1140 x 17.0 x 20.1 (mm)	225 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Ultra Low Flux (4.50 W/m)	SBL1-03UL50E_X	5000K	120 lm	1.31 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03UL40E_X	4000K	120 lm	1.31 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03UL35E_X	3500K	115 lm	1.31 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03UL30E_X	3000K	110 lm	1.31 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03UL27E_X	2700K	100 lm	1.31 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-06UL50E_X	5000K	240 lm	2.62 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06UL40E_X	4000K	240 lm	2.62 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06UL35E_X	3500K	230 lm	2.62 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06UL30E_X	3000K	220 lm	2.62 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06UL27E_X	2700K	200 lm	2.62 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-09UL50E_X	5000K	360 lm	3.93 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09UL40E_X	4000K	360 lm	3.93 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09UL35E_X	3500K	345 lm	3.93 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09UL30E_X	3000K	330 lm	3.93 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09UL27E_X	2700K	300 lm	3.93 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-10UL50E_X	5000K	410 lm	4.50 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10UL40E_X	4000K	410 lm	4.50 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10UL35E_X	3500K	395 lm	4.50 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10UL30E_X	3000K	380 lm	4.50 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10UL27E_X	2700K	345 lm	4.50 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-12UL50E_X	5000K	480 lm	5.24 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12UL40E_X	4000K	480 lm	5.24 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12UL35E_X	3500K	460 lm	5.24 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12UL30E_X	3000K	400 lm	5.24 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12UL27E_X	2700K	380 lm	5.24 W	140°	1140 x 17.0 x 20.1 (mm)	225 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Super Low Flux (3.00 W/m)	SBL1-03SL50E_X	5000K	80 lm	0.88 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03SL40E_X	4000K	80 lm	0.88 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03SL35E_X	3500K	77 lm	0.88 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03SL30E_X	3000K	75 lm	0.88 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-03SL27E_X	2700K	70 lm	0.88 W	140°	287 x 17.0 x 20.1 (mm)	61.5 g
	SBL1-06SL50E_X	5000K	160 lm	1.76 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06SL40E_X	4000K	160 lm	1.76 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06SL35E_X	3500K	154 lm	1.76 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06SL30E_X	3000K	150 lm	1.76 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-06SL27E_X	2700K	140 lm	1.76 W	140°	571 x 17.0 x 20.1 (mm)	117.2 g
	SBL1-09SL50E_X	5000K	240 lm	2.64 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09SL40E_X	4000K	240 lm	2.64 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09SL35E_X	3500K	231 lm	2.64 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09SL30E_X	3000K	225 lm	2.64 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-09SL27E_X	2700K	210 lm	2.64 W	140°	856 x 17.0 x 20.1 (mm)	171 g
	SBL1-10SL50E_X	5000K	275 lm	3.00 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10SL40E_X	4000K	275 lm	3.00 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10SL35E_X	3500K	265 lm	3.00 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10SL30E_X	3000K	255 lm	3.00 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-10SL27E_X	2700K	245 lm	3.00 W	140°	978 x 17.0 x 20.1 (mm)	204 g
	SBL1-12SL50E_X	5000K	320 lm	3.52 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12SL40E_X	4000K	320 lm	3.52 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12SL35E_X	3500K	308 lm	3.52 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12SL30E_X	3000K	300 lm	3.52 W	140°	1140 x 17.0 x 20.1 (mm)	225 g
	SBL1-12SL27E_X	2700K	280 lm	3.52 W	140°	1140 x 17.0 x 20.1 (mm)	225 g

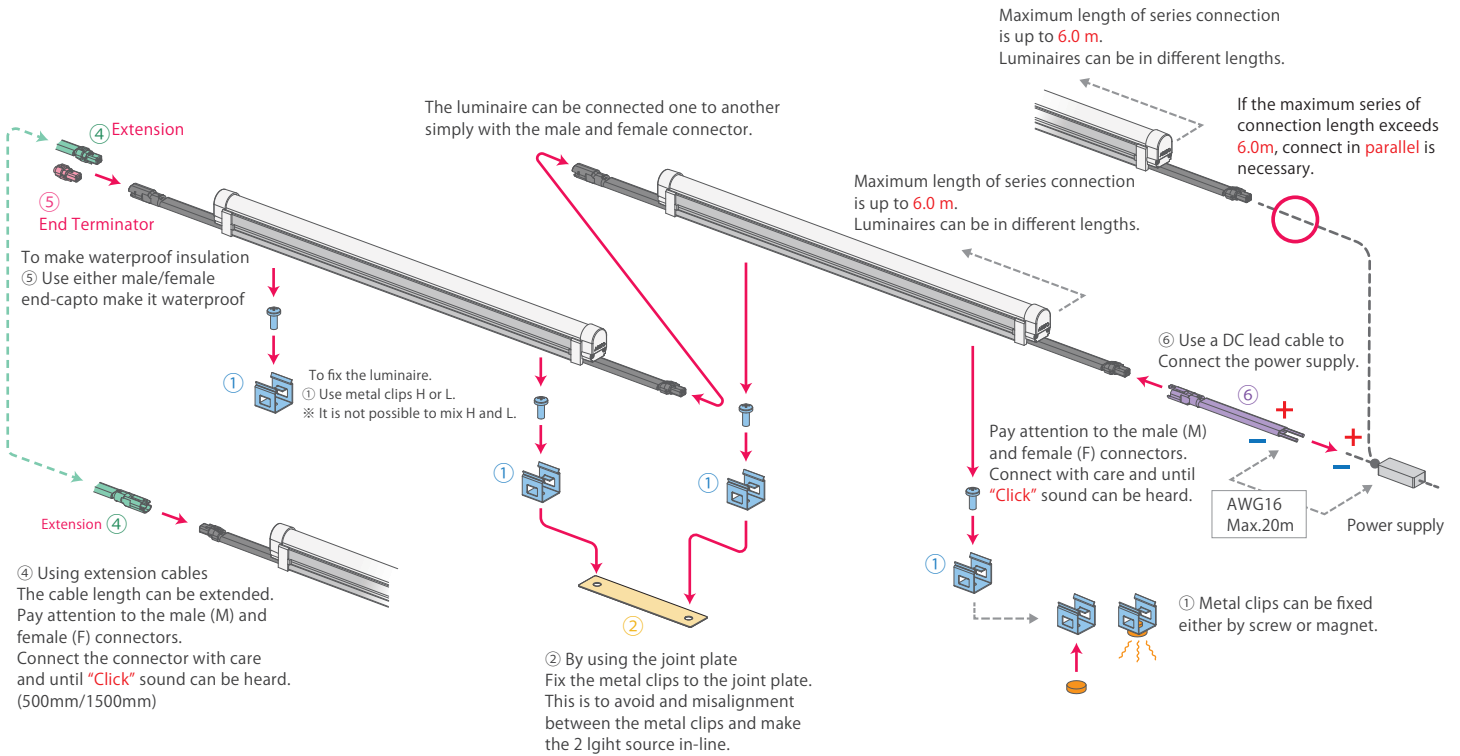


<Installation Image>

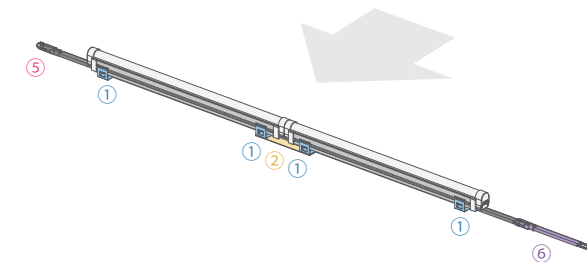


① Metal Clip

The Metal Clip H allows the connectors to be stored inside the metal clip, so that the wiring can be neatly installed.



③ Stopper Plate

When installed vertically, e.g. on a wall, Prevents the product from shifting or falling due to gravity.



① Metal Clip

H : M416007-0112-01
L : M417000-0032



(For connector storage)

② Joint Plate

M417003-0140*



③ Stopper Plate

M417003-0141



④ Extension Cable

500mm : BWC-0000-0359B
1500mm : BWC-0000-0354B



⑤ End Terminator

F : BCN-0000-0077F
M : BCN-0000-0077



⑥ DC Lead Cable

F : BWC-0000-0470F
M : BWC-0000-0470M



DC Jack Cable

1500mm : BWC-0000-0583A



DIMMER

<Without dimming>



<With dimming>

