

SBMS1 シームレスビーム M



- Constant voltage DC24V driven method.
- Seamless effect, less glare and high colour rendering index.
- Ideal for outdoor borders, indirect lighting and under-shelf lighting.
- Seamless when 2 light source connected side-by-side.
- Dimming function is available.
- Wire harness can be stored inside the Metal Clip H.
- Waterproof connectors for easy connection.
- Other CCT available upon request.



Clip H is designed to be stored internally



Waterproof connector



BASIC SPECIFICATION

PART NO.

SBMS1-△△HOOE

○ Standard ● Customize


12 : 4ft (1140mm)	65 : 6500K●
10 : 1m(978mm)	50 : 5000K○
09 : 3ft (856mm)	40 : 4000K●
06 : 2ft (571mm)	35 : 3500K●
03 : 1ft (287mm)	30 : 3000K○
	27 : 2700K●

INPUT VOLTAGE	DC24V
COLOR TEMPERATURE	2700K 3000K 3500K 4000K 5000K
AVERAGE CRI	>Ra90
POWER CONSUMPTION	15.32W / 13.13W / 11.49W / 7.66W / 3.83W [4ft] [1m] [3ft] [2ft] [1ft]
BEAM ANGLE	140°
LEVEL OF PROTECTION	IP65
OPERATION TEMP./HUM.	-20°C ~ +50°C / 20°C ~ 85%RH
STORAGE TEMPERATURE	-20°C ~ +70°C


LIST OF AVAILABLE PRODUCTION LENGTHS

PART NO. :	LENGTH	POWER	Standard	Customize
004	44 mm	0.55W		
008	84 mm	1.09W		
012	125 mm	1.64W		
016	165 mm	2.19W		
021	206 mm	2.74W		
025	247 mm	3.28W		
03	287 mm	3.83W		
033	328 mm	4.38W		
037	368 mm	4.92W		
04	409 mm	5.47W		
045	450 mm	6.02W		
049	490 mm	6.57W		
053	531 mm	7.11W		
06	571 mm	7.66W		
062	612 mm	8.21W		
065	653 mm	8.75W		
069	693 mm	9.30W		
073	734 mm	9.85W		
077	774 mm	10.39W		
082	815 mm	10.94W		
09	856 mm	11.49W		
096	896 mm	12.04W		
097	937 mm	12.58W		
10	978 mm	13.13W		
102	1018 mm	13.68W		
106	1059 mm	14.22W		
109	1099 mm	14.77W		
12	1140 mm	15.32W		


※ In addition to the above, lengths of 1200 and over can be produced. Please enquire for details.
 ※ Please enquire about suggested retail prices for custom-made colour temperatures.

SBMS1-△△H50E
5000K


1360 / 1165 / 1020 / 680 / 340 lm

SBMS1-△△H40E
4000K


1360 / 1165 / 1020 / 680 / 340 lm

SBMS1-△△H35E
3500K

1312 / 1125 / 984 / 656 / 328 lm


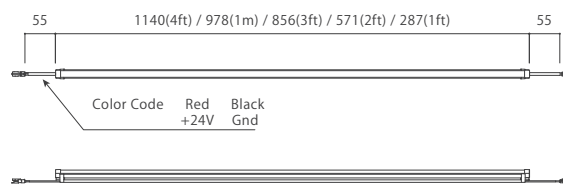
SBMS1-△△H30E
3000K

1280 / 1100 / 960 / 640 / 320 lm

SBMS1-△△H27E
2700K

1200 / 1030 / 900 / 600 / 300 lm

※ 4ft polar light distribution curve.
 ※ Luminous flux for 1ft / 2ft / 3ft / 4ft.
 ※ Grid 500 x 500 mm / Illuminating surface ≈ 3500 x 3000 mm



	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
High Flux (13.13 W/m)	SBMS1-03H50E_X	5000K	340 lm	3.83 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g
	SBMS1-03H40E_X	4000K	340 lm	3.83 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g
	SBMS1-03H35E_X	3500K	328 lm	3.83 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g
	SBMS1-03H30E_X	3000K	320 lm	3.83 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g
	SBMS1-03H27E_X	2700K	300 lm	3.83 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g
	SBMS1-06H50E_X	5000K	680 lm	7.66 W	140°	571 x 17.4 x 23.2 (mm)	130 g
	SBMS1-06H40E_X	4000K	680 lm	7.66 W	140°	571 x 17.4 x 23.2 (mm)	130 g
	SBMS1-06H35E_X	3500K	656 lm	7.66 W	140°	571 x 17.4 x 23.2 (mm)	130 g
	SBMS1-06H30E_X	3000K	640 lm	7.66 W	140°	571 x 17.4 x 23.2 (mm)	130 g
	SBMS1-06H27E_X	2700K	600 lm	7.66 W	140°	571 x 17.4 x 23.2 (mm)	130 g
	SBMS1-09H50E_X	5000K	1020 lm	11.49 W	140°	856 x 17.4 x 23.2 (mm)	207 g
	SBMS1-09H40E_X	4000K	1020 lm	11.49 W	140°	856 x 17.4 x 23.2 (mm)	207 g
	SBMS1-09H35E_X	3500K	984 lm	11.49 W	140°	856 x 17.4 x 23.2 (mm)	207 g
	SBMS1-09H30E_X	3000K	960 lm	11.49 W	140°	856 x 17.4 x 23.2 (mm)	207 g
	SBMS1-09H27E_X	2700K	900 lm	11.49 W	140°	856 x 17.4 x 23.2 (mm)	207 g
	SBMS1-10H50E_X	5000K	1165 lm	13.13 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g
	SBMS1-10H40E_X	4000K	1165 lm	13.13 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g
	SBMS1-10H35E_X	3500K	1125 lm	13.13 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g
	SBMS1-10H30E_X	3000K	1100 lm	13.13 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g
	SBMS1-10H27E_X	2700K	1030 lm	13.13 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g
	SBMS1-12H50E_X	5000K	1360 lm	15.32 W	140°	1140 x 17.4 x 23.2 (mm)	258 g
	SBMS1-12H40E_X	4000K	1360 lm	15.32 W	140°	1140 x 17.4 x 23.2 (mm)	258 g
	SBMS1-12H35E_X	3500K	1312 lm	15.32 W	140°	1140 x 17.4 x 23.2 (mm)	258 g
	SBMS1-12H30E_X	3000K	1280 lm	15.32 W	140°	1140 x 17.4 x 23.2 (mm)	258 g
	SBMS1-12H27E_X	2700K	1200 lm	15.32 W	140°	1140 x 17.4 x 23.2 (mm)	258 g

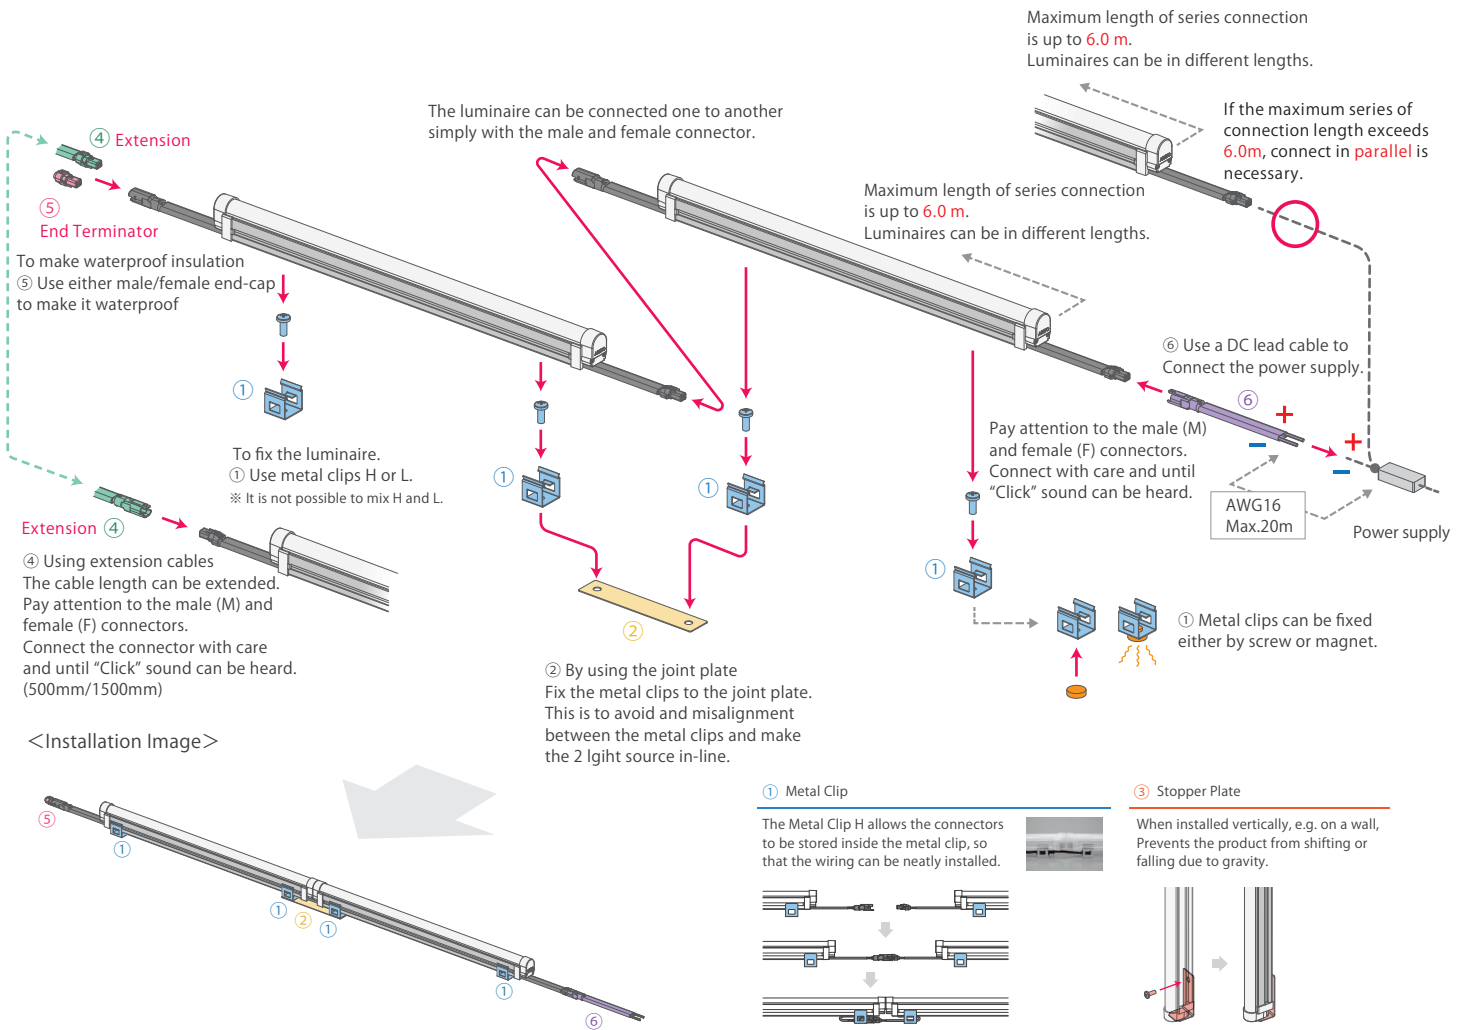
	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Low Flux (8.97 W/m)	SBMS1-03L50E_X	5000K	240 lm	2.62 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g
	SBMS1-03L40E_X	4000K	240 lm	2.62 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g
	SBMS1-03L35E_X	3500K	232 lm	2.62 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g
	SBMS1-03L30E_X	3000K	230 lm	2.62 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g
	SBMS1-03L27E_X	2700K	220 lm	2.62 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g
	SBMS1-06L50E_X	5000K	480 lm	5.24 W	140°	571 x 17.4 x 23.2 (mm)	130 g
	SBMS1-06L40E_X	4000K	480 lm	5.24 W	140°	571 x 17.4 x 23.2 (mm)	130 g
	SBMS1-06L35E_X	3500K	464 lm	5.24 W	140°	571 x 17.4 x 23.2 (mm)	130 g
	SBMS1-06L30E_X	3000K	460 lm	5.24 W	140°	571 x 17.4 x 23.2 (mm)	130 g
	SBMS1-06L27E_X	2700K	440 lm	5.24 W	140°	571 x 17.4 x 23.2 (mm)	130 g
	SBMS1-09L50E_X	5000K	720 lm	7.86 W	140°	856 x 17.4 x 23.2 (mm)	207 g
	SBMS1-09L40E_X	4000K	720 lm	7.86 W	140°	856 x 17.4 x 23.2 (mm)	207 g
	SBMS1-09L35E_X	3500K	696 lm	7.86 W	140°	856 x 17.4 x 23.2 (mm)	207 g
	SBMS1-09L30E_X	3000K	690 lm	7.86 W	140°	856 x 17.4 x 23.2 (mm)	207 g
	SBMS1-09L27E_X	2700K	660 lm	7.86 W	140°	856 x 17.4 x 23.2 (mm)	207 g
	SBMS1-10L50E_X	5000K	825 lm	8.97 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g
	SBMS1-10L40E_X	4000K	825 lm	8.97 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g
	SBMS1-10L35E_X	3500K	795 lm	8.97 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g
	SBMS1-10L30E_X	3000K	790 lm	8.97 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g
	SBMS1-10L27E_X	2700K	755 lm	8.97 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g
	SBMS1-12L50E_X	5000K	960 lm	10.48 W	140°	1140 x 17.4 x 23.2 (mm)	258 g
	SBMS1-12L40E_X	4000K	960 lm	10.48 W	140°	1140 x 17.4 x 23.2 (mm)	258 g
	SBMS1-12L35E_X	3500K	928 lm	10.48 W	140°	1140 x 17.4 x 23.2 (mm)	258 g
	SBMS1-12L30E_X	3000K	920 lm	10.48 W	140°	1140 x 17.4 x 23.2 (mm)	258 g
	SBMS1-12L27E_X	2700K	880 lm	10.48 W	140°	1140 x 17.4 x 23.2 (mm)	258 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight	
Mid Low Flux (7.50 W/m)	SBMS1-03ML50E_X	5000K	200 lm	2.19 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	Linear Type - outdoor / wide
	SBMS1-03ML40E_X	4000K	200 lm	2.19 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03ML35E_X	3500K	194 lm	2.19 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03ML30E_X	3000K	192 lm	2.19 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03ML27E_X	2700K	184 lm	2.19 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-06ML50E_X	5000K	400 lm	4.38 W	140°	571 x 17.4 x 23.2 (mm)	130 g	Linear Type - indoor / wide
	SBMS1-06ML40E_X	4000K	400 lm	4.38 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06ML35E_X	3500K	388 lm	4.38 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06ML30E_X	3000K	384 lm	4.38 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06ML27E_X	2700K	368 lm	4.38 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-09ML50E_X	5000K	600 lm	6.57 W	140°	856 x 17.4 x 23.2 (mm)	207 g	Linear Type - indoor / narrow
	SBMS1-09ML40E_X	4000K	600 lm	6.57 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09ML35E_X	3500K	582 lm	6.57 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09ML30E_X	3000K	576 lm	6.57 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09ML27E_X	2700K	552 lm	6.57 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-10ML50E_X	5000K	655 lm	7.50 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	Linear Type - outdoor / narrow
	SBMS1-10ML40E_X	4000K	655 lm	7.50 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10ML35E_X	3500K	665 lm	7.50 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10ML30E_X	3000K	660 lm	7.50 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10ML27E_X	2700K	630 lm	7.50 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-12ML50E_X	5000K	800 lm	8.76 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	Linear Type - outdoor / narrow
	SBMS1-12ML40E_X	4000K	800 lm	8.76 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12ML35E_X	3500K	776 lm	8.76 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12ML30E_X	3000K	768 lm	8.76 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12ML27E_X	2700K	732 lm	8.76 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight	
Very Low Flux (6.00 W/m)	SBMS1-03VL50E_X	5000K	160 lm	1.75 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	Module Type - outdoor
	SBMS1-03VL40E_X	4000K	160 lm	1.75 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03VL35E_X	3500K	153 lm	1.75 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03VL30E_X	3000K	150 lm	1.75 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03VL27E_X	2700K	140 lm	1.75 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-06VL50E_X	5000K	320 lm	3.50 W	140°	571 x 17.4 x 23.2 (mm)	130 g	Floodlight - outdoor
	SBMS1-06VL40E_X	4000K	320 lm	3.50 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06VL35E_X	3500K	306 lm	3.50 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06VL30E_X	3000K	300 lm	3.50 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06VL27E_X	2700K	280 lm	3.50 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-09VL50E_X	5000K	480 lm	5.25 W	140°	856 x 17.4 x 23.2 (mm)	207 g	Down Light - indoor
	SBMS1-09VL40E_X	4000K	480 lm	5.25 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09VL35E_X	3500K	459 lm	5.25 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09VL30E_X	3000K	450 lm	5.25 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09VL27E_X	2700K	420 lm	5.25 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-10VL50E_X	5000K	550 lm	6.00 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	Stretch Ceiling Membrane
	SBMS1-10VL40E_X	4000K	550 lm	6.00 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10VL35E_X	3500K	525 lm	6.00 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10VL30E_X	3000K	515 lm	6.00 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10VL27E_X	2700K	480 lm	6.00 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-12VL50E_X	5000K	640 lm	7.00 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	Stretch Ceiling Membrane
	SBMS1-12VL40E_X	4000K	640 lm	7.00 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12VL35E_X	3500K	612 lm	7.00 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12VL30E_X	3000K	600 lm	7.00 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12VL27E_X	2700K	560 lm	7.00 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight	
Ultra Low Flux (4.50 W/m)	SBMS1-03UL50E_X	5000K	120 lm	1.31 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	Linear Type - outdoor / wide
	SBMS1-03UL40E_X	4000K	120 lm	1.31 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03UL35E_X	3500K	115 lm	1.31 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03UL30E_X	3000K	110 lm	1.31 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03UL27E_X	2700K	100 lm	1.31 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-06UL50E_X	5000K	240 lm	2.62 W	140°	571 x 17.4 x 23.2 (mm)	130 g	Linear Type - indoor / wide
	SBMS1-06UL40E_X	4000K	240 lm	2.62 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06UL35E_X	3500K	230 lm	2.62 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06UL30E_X	3000K	220 lm	2.62 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06UL27E_X	2700K	200 lm	2.62 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-09UL50E_X	5000K	360 lm	3.93 W	140°	856 x 17.4 x 23.2 (mm)	207 g	Linear Type - indoor / narrow
	SBMS1-09UL40E_X	4000K	360 lm	3.93 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09UL35E_X	3500K	345 lm	3.93 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09UL30E_X	3000K	330 lm	3.93 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09UL27E_X	2700K	300 lm	3.93 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-10UL50E_X	5000K	410 lm	4.50 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	Linear Type - outdoor / narrow
	SBMS1-10UL40E_X	4000K	410 lm	4.50 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10UL35E_X	3500K	395 lm	4.50 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10UL30E_X	3000K	380 lm	4.50 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10UL27E_X	2700K	345 lm	4.50 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-12UL50E_X	5000K	480 lm	5.24 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	Linear Type - outdoor / narrow
	SBMS1-12UL40E_X	4000K	480 lm	5.24 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12UL35E_X	3500K	460 lm	5.24 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12UL30E_X	3000K	400 lm	5.24 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12UL27E_X	2700K	380 lm	5.24 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight	
Super Low Flux (3.00 W/m)	SBMS1-03SL50E_X	5000K	80 lm	0.88 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	Module Type - outdoor
	SBMS1-03SL40E_X	4000K	80 lm	0.88 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03SL35E_X	3500K	77 lm	0.88 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03SL30E_X	3000K	75 lm	0.88 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-03SL27E_X	2700K	70 lm	0.88 W	140°	287 x 17.4 x 23.2 (mm)	69.5 g	
	SBMS1-06SL50E_X	5000K	160 lm	1.76 W	140°	571 x 17.4 x 23.2 (mm)	130 g	Floodlight - outdoor
	SBMS1-06SL40E_X	4000K	160 lm	1.76 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06SL35E_X	3500K	154 lm	1.76 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06SL30E_X	3000K	150 lm	1.76 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-06SL27E_X	2700K	140 lm	1.76 W	140°	571 x 17.4 x 23.2 (mm)	130 g	
	SBMS1-09SL50E_X	5000K	240 lm	2.64 W	140°	856 x 17.4 x 23.2 (mm)	207 g	Down Light - indoor
	SBMS1-09SL40E_X	4000K	240 lm	2.64 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09SL35E_X	3500K	231 lm	2.64 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09SL30E_X	3000K	225 lm	2.64 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-09SL27E_X	2700K	210 lm	2.64 W	140°	856 x 17.4 x 23.2 (mm)	207 g	
	SBMS1-10SL50E_X	5000K	275 lm	3.00 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	Stretch Ceiling Membrane
	SBMS1-10SL40E_X	4000K	275 lm	3.00 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10SL35E_X	3500K	265 lm	3.00 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10SL30E_X	3000K	255 lm	3.00 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-10SL27E_X	2700K	245 lm	3.00 W	140°	978 x 17.4 x 23.2 (mm)	222.5 g	
	SBMS1-12SL50E_X	5000K	320 lm	3.52 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	Stretch Ceiling Membrane
	SBMS1-12SL40E_X	4000K	320 lm	3.52 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12SL35E_X	3500K	308 lm	3.52 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12SL30E_X	3000K	300 lm	3.52 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	
	SBMS1-12SL27E_X	2700K	280 lm	3.52 W	140°	1140 x 17.4 x 23.2 (mm)	258 g	



① Metal Clip	② Joint Plate	③ Stopper Plate	④ Extension Cable	⑤ End Cap	⑥ DC Lead Cable	DC Jack Cable
H : M416007-0112-01 L : M417000-0032	M417003-0140	M417003-0141	500mm : BWC-0000-0359B 1500mm : BWC-0000-0354B	F : BCN-0000-0077F M : BCN-0000-0077	F : BWC-0000-0470F M : BWC-0000-0470M	1500mm : BWC-0000-0583A
						
(For connector storage)						

DIMMER

