

Flood Light 2500

FB25J フラッドライト 2500



- Ideal for outdoor and parking lot lighting
- Ensures safety with anti-fall steel wire
- Lightweight and integrated power supply
- Anti-glare with diffuse plate




Anti-fall wire


BASIC SPECIFICATION

PART NUMBER	FB25J-OOHB
	B : Black Frame Type
	65 : 6500K ●
	50 : 5000K ○
	40 : 4000K ●
	30 : 3000K ●
	27 : 2700K ●
	○ Ex-stock ● Customized


INPUT VOLTAGE	AC100~240V
COLOR TEMPERATURE	2700K 3000K 4000K 5000K 6500K
AVERAGE CRI	>Ra80
INPUT CAPACITY	35VA
BEAM ANGLE	105°
LEVEL OF PROTECTION	IP65
WEIGHT	1.23kg
OPERATION TEMP./HUM.	-20°C ~ +50°C / 20°C ~ 85%RH
STORAGE TEMPERATURE	-20°C ~ +70°C

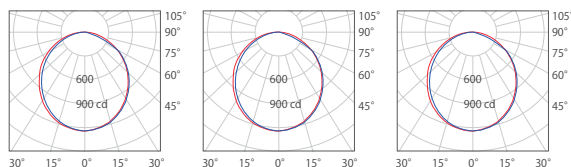



FB25J-65H
6500K
3380 lm





FB25J-50H
5000K
3380 lm




FB25J-40H
4000K
3225 lm




FB25J-30H
3000K
3180 lm



FB25J-27H
2700K
2960 lm

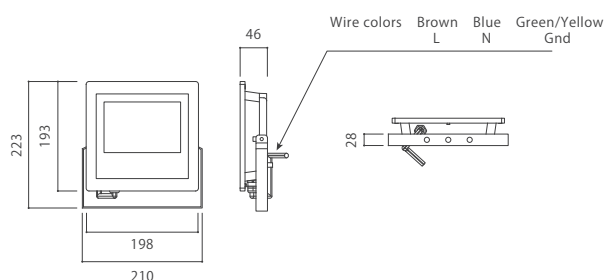

※ 4ft / 2ft polar light distribution curve.
※ Grid 500 x 500 mm / Illuminating surface ≈ 3500 x 3000 mm

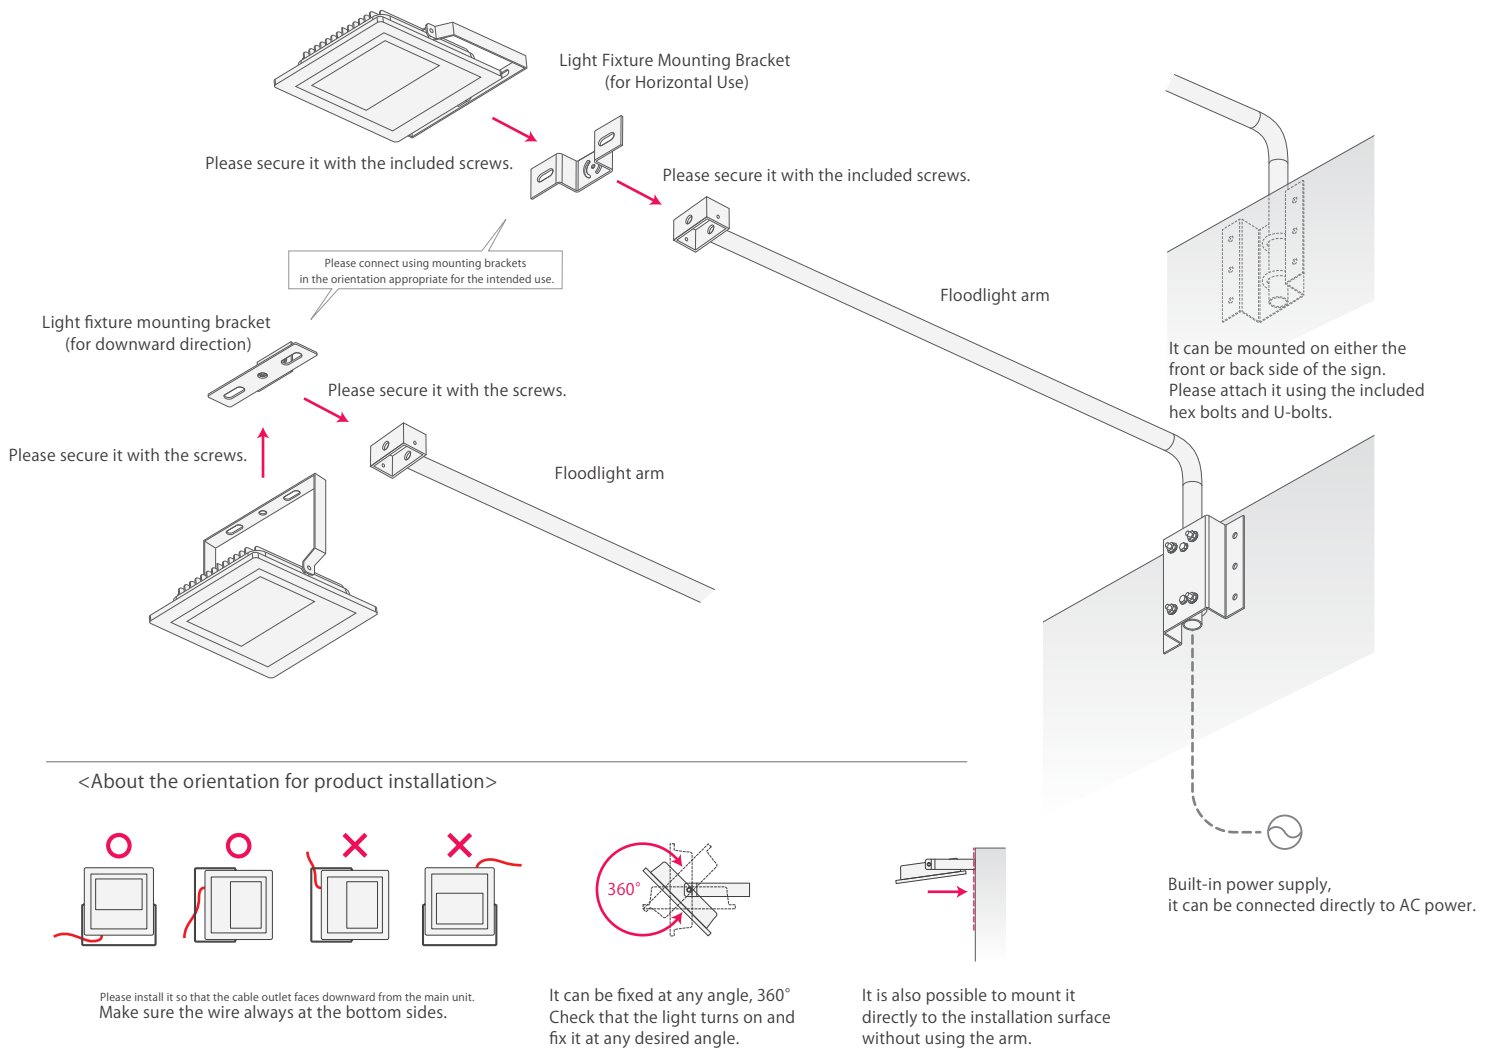

ACCESSORIES



Product Name	Arm (Black)	Arm (White)
Product Number	FLA1-09B	FLA1-09S / FLA1-12S
Length	900mm	900mm / 1200mm
Wind Pressure Resistance	60m/s	60m/s
Accessories	Lighting Fixture Mounting Bracket	Lighting Fixture Mounting Bracket



Product Name	Surge Protector
Product Number	RAM-302BWZ
Length	1500V / 60s