

LB5D/LB5DF

ラスタービーム V DSL / ラスタービーム V DSL FLEX



- Ideal for indirect and under-shelf lighting
- Monochromatic dimming possible
- Easy connection with connectors
- Wiring can be stored inside the metal clip H
- FLEX for curved indirect lighting



Connectors

Clip H Stowable inside

FLEX Image



BASIC SPECIFICATION

PART NO.

LB5DF10-01HOOE

LB5D-△△HOOE

○ Standard ● Customize

12 : 4ft (1140mm) ○
 10 : 1m (978mm) ●
 09 : 3ft (856mm) ○
 06 : 2ft (571mm) ○
 03 : 1ft (287mm) ○

65 : 6500K ●
 50 : 5000K ○
 40 : 4000K ○
 35 : 3500K ●
 30 : 3000K ○
 27 : 2700K ●

INPUT VOLTAGE	DC24V
COLOR TEMPERATURE	2700K 3000K 4000K 5000K 6500K
AVERAGE CRI	>Ra90
POWER CONSUMPTION	15.32W / 11.49W / 7.66W / 3.83W / 10.90W [4ft] [3ft] [2ft] [1ft] [FLEX]
BEAM ANGLE	140°
LEVEL OF PROTECTION	IP20 (Indoor)
OPERATION TEMP./HUM.	-20°C ~ +50°C / 20°C ~ 85%RH
STORAGE TEMPERATURE	-20°C ~ +70°C

■ LIST OF AVAILABLE PRODUCTION LENGTHS



PART NO. :	LENGTH	POWER	Standard	Customize
004 :	44 mm	0.55W		
01 :	84 mm	1.09W		
012 :	125 mm	1.64W		
016 :	165 mm	2.19W		
02 :	206 mm	2.74W		
025 :	247 mm	3.28W		
03 :	287 mm	3.83W		
033 :	328 mm	4.38W		
037 :	368 mm	4.92W		
04 :	409 mm	5.47W		
045 :	450 mm	6.02W		
05 :	490 mm	6.57W		
053 :	531 mm	7.11W		
06 :	571 mm	7.66W		
061 :	612 mm	8.21W		
065 :	653 mm	8.75W		
07 :	693 mm	9.30W		
073 :	734 mm	9.85W		
08 :	774 mm	10.39W		
082 :	815 mm	10.94W		
09 :	856 mm	11.49W		
091 :	896 mm	12.04W		
094 :	937 mm	12.58W		
10 :	978 mm	13.13W		
102 :	1018 mm	13.68W		
11 :	1059 mm	14.22W		
111 :	1099 mm	14.77W		
12 :	1140 mm	15.32W		

※ In addition to the above, it is possible to change the product length and number of connections for FLEX and product of lengths 4ft and over.
Please enquire for details.

※ Please enquire about suggested retail prices for custom-made colour temperatures.



Specification may be subject to change without announcement. Data is only for reference.

www.aristo.com.sg, Tel: (65) 6479 2358, Fax: (65) 6479 3558





LB5D-△△H65E
6500K

1540 / 1155 / 770 / 385 / 1095 lm





LB5D-△△H50E
5000K

1560 / 1170 / 780 / 390 / 1110 lm





LB5D-△△H40E
4000K

1560 / 1170 / 780 / 390 / 1110 lm





LB5D-△△H35E
3500K

1520 / 1140 / 760 / 380 / 1090 lm



LB5D-△△H30E
3000K

1460 / 1095 / 730 / 365 / 1040 lm




LB5D-△△H27E
2700K

1380 / 1035 / 690 / 345 / 990 lm


※ Light distribution curve is for 4ft.

※ Luminous flux values are luminous flux of the luminaire [4ft/3ft/2ft/1ft/FLEX].

※ Grid 500 x 500 mm / Illuminating surface = 3500 x 3000 mm

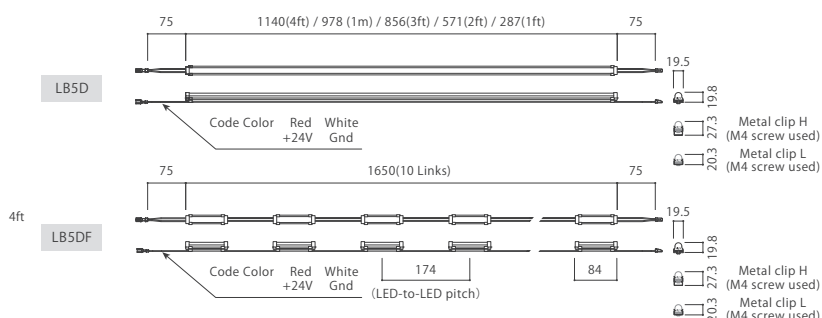

PRODUCT CONNECTION DIAGRAM

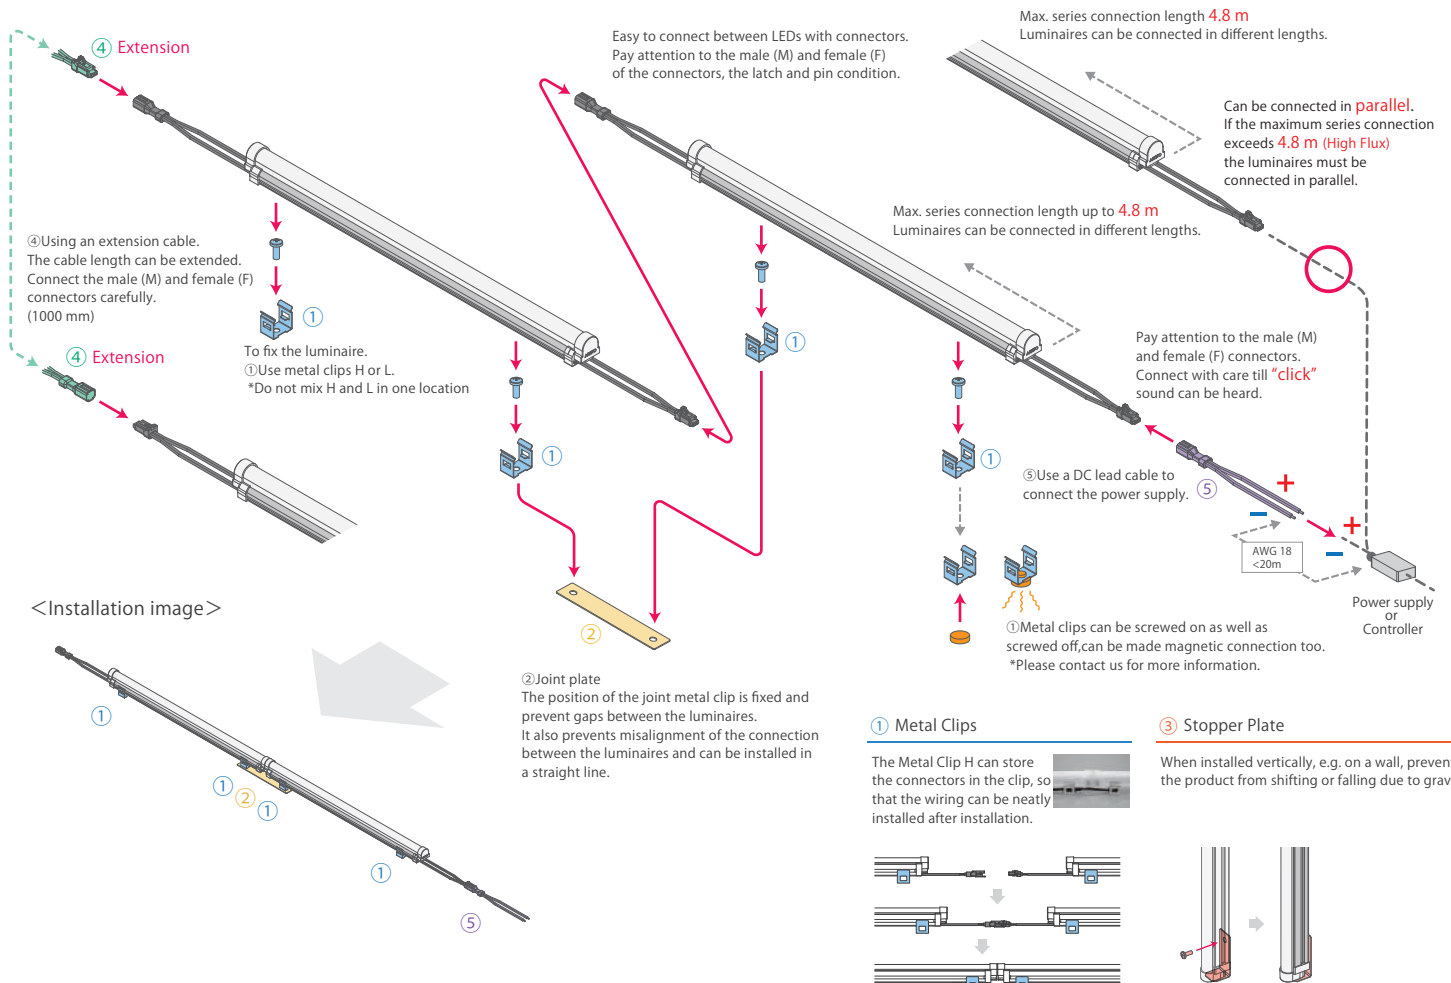

① Metal Clips

H : M421000-0015-01
 L : M421000-0014



(For connector storage)
 (L) x (W) x (H)
 H Clip : 16.8 x 15.0 x 16.11 mm
 L Clip : 16.4 x 15.0 x 7.7 mm

② Joint Plate

M417003-0140



(L) x (W)
 80.0 x 15.4 mm

③ Stopper Plate

M417003-0141



(L) x (W) x (H)
 41.0 x 15.4 x 17.0 mm


④ Extension Cable

1000mm : BWC-0000-0377A



⑤ DC Lead Cables

F : BWC-0000-0332 / BWC-0000-0332A
 M : BWC-0000-0333B



※ F is either, depending on stock availability.
 ※ Maximum current ≤4A in one series connection.

DC Jack Cable

1500mm : BWC-0000-0571A




DIMMER



<Without dimming>



<0-10V / 1-10V dimming / PWM >



<0-10V / 1-10V dimming / PWM / DALI>

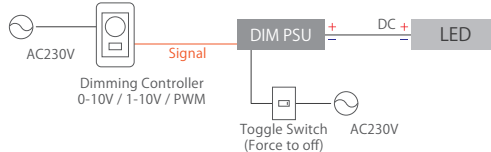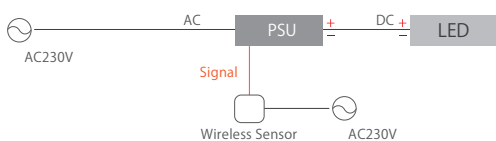

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
High Flux (13.13 W/m)	LB5D-03H50E_X	5000K	390 lm	3.83 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03H40E_X	4000K	390 lm	3.83 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03H30E_X	3000K	365 lm	3.83 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03H27E_X	2700K	345 lm	3.83 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-06H50E_X	5000K	780 lm	7.66 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06H40E_X	4000K	780 lm	7.66 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06H30E_X	3000K	730 lm	7.66 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06H27E_X	2700K	690 lm	7.66 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-09H50E_X	5000K	1170 lm	11.49 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09H40E_X	4000K	1170 lm	11.49 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09H30E_X	3000K	1095 lm	11.49 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09H27E_X	2700K	1035 lm	11.49 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-10H50E_X	5000K	1330 lm	13.13 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10H40E_X	4000K	1330 lm	13.13 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10H30E_X	3000K	1270 lm	13.13 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10H27E_X	2700K	1180 lm	13.13 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-12H50E_X	5000K	1560 lm	15.32 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12H40E_X	4000K	1560 lm	15.32 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12H30E_X	3000K	1460 lm	15.32 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12H27E_X	2700K	1380 lm	15.32 W	140	1140 x 19.5 x 19.8 (mm)	215 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Low Flux (8.97 W/m)	LB5D-03L50E_X	5000K	275 lm	2.62 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03L40E_X	4000K	275 lm	2.62 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03L30E_X	3000K	255 lm	2.62 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03L27E_X	2700K	245 lm	2.62 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-06L50E_X	5000K	550 lm	5.24 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06L40E_X	4000K	550 lm	5.24 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06L30E_X	3000K	510 lm	5.24 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06L27E_X	2700K	490 lm	5.24 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-09L50E_X	5000K	825 lm	7.86 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09L40E_X	4000K	825 lm	7.86 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09L30E_X	3000K	765 lm	7.86 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09L27E_X	2700K	735 lm	7.86 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-10L50E_X	5000K	940 lm	8.97 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10L40E_X	4000K	940 lm	8.97 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10L30E_X	3000K	875 lm	8.97 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10L27E_X	2700K	840 lm	8.97 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-12L50E_X	5000K	1100 lm	10.48 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12L40E_X	4000K	1100 lm	10.48 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12L30E_X	3000K	1020 lm	10.48 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12L27E_X	2700K	980 lm	10.48 W	140	1140 x 19.5 x 19.8 (mm)	215 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Mid Low Flux (7.50 W/m)	LB5D-03ML50E_X	5000K	240 lm	2.19 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03ML40E_X	4000K	240 lm	2.19 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03ML30E_X	3000K	220 lm	2.19 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03ML27E_X	2700K	215 lm	2.19 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-06ML50E_X	5000K	480 lm	4.38 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06ML40E_X	4000K	480 lm	4.38 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06ML30E_X	3000K	440 lm	4.38 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06ML27E_X	2700K	430 lm	4.38 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-09ML50E_X	5000K	720 lm	6.57 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09ML40E_X	4000K	720 lm	6.57 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09ML30E_X	3000K	660 lm	6.57 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09ML27E_X	2700K	645 lm	6.57 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-10ML50E_X	5000K	815 lm	7.50 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10ML40E_X	4000K	815 lm	7.50 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10ML30E_X	3000K	730 lm	7.50 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10ML27E_X	2700K	700 lm	7.50 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-12ML50E_X	5000K	960 lm	8.76 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12ML40E_X	4000K	960 lm	8.76 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12ML30E_X	3000K	880 lm	8.76 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12ML27E_X	2700K	860 lm	8.76 W	140	1140 x 19.5 x 19.8 (mm)	215 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Very Low Flux (6.00 W/m)	LB5D-03VL50E_X	5000K	200 lm	1.75 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03VL40E_X	4000K	200 lm	1.75 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03VL30E_X	3000K	180 lm	1.75 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03VL27E_X	2700K	170 lm	1.75 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-06VL50E_X	5000K	400 lm	3.50 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06VL40E_X	4000K	400 lm	3.50 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06VL30E_X	3000K	360 lm	3.50 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06VL27E_X	2700K	340 lm	3.50 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-09VL50E_X	5000K	600 lm	5.25 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09VL40E_X	4000K	600 lm	5.25 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09VL30E_X	3000K	540 lm	5.25 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09VL27E_X	2700K	510 lm	5.25 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-10VL50E_X	5000K	680 lm	6.00 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10VL40E_X	4000K	680 lm	6.00 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10VL30E_X	3000K	580 lm	6.00 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10VL27E_X	2700K	560 lm	6.00 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-12VL50E_X	5000K	800 lm	7.00 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12VL40E_X	4000K	800 lm	7.00 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12VL30E_X	3000K	720 lm	7.00 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12VL27E_X	2700K	680 lm	7.00 W	140	1140 x 19.5 x 19.8 (mm)	215 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Ultra Low Flux (4.50 W/m)	LB5D-03UL50E_X	5000K	155 lm	1.31 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03UL40E_X	4000K	155 lm	1.31 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03UL30E_X	3000K	145 lm	1.31 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03UL27E_X	2700K	140 lm	1.31 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-06UL50E_X	5000K	310 lm	2.62 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06UL40E_X	4000K	310 lm	2.62 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06UL30E_X	3000K	290 lm	2.62 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06UL27E_X	2700K	280 lm	2.62 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-09UL50E_X	5000K	465 lm	3.93 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09UL40E_X	4000K	465 lm	3.93 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09UL30E_X	3000K	435 lm	3.93 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09UL27E_X	2700K	420 lm	3.93 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-10UL50E_X	5000K	475 lm	4.50 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10UL40E_X	4000K	475 lm	4.50 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10UL30E_X	3000K	445 lm	4.50 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10UL27E_X	2700K	476 lm	4.50 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-12UL50E_X	5000K	620 lm	5.24 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12UL40E_X	4000K	620 lm	5.24 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12UL30E_X	3000K	580 lm	5.24 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12UL27E_X	2700K	560 lm	5.24 W	140	1140 x 19.5 x 19.8 (mm)	215 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Super Flux (3.00 W/m)	LB5D-03SL50E_X	5000K	110 lm	0.88 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03SL40E_X	4000K	110 lm	0.88 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03SL30E_X	3000K	100 lm	0.88 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-03SL27E_X	2700K	95 lm	0.88 W	140	287 x 19.5 x 19.8 (mm)	57 g
	LB5D-06SL50E_X	5000K	220 lm	1.76 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06SL40E_X	4000K	220 lm	1.76 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06SL30E_X	3000K	200 lm	1.76 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-06SL27E_X	2700K	190 lm	1.76 W	140	571 x 19.5 x 19.8 (mm)	114 g
	LB5D-09SL50E_X	5000K	330 lm	2.64 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09SL40E_X	4000K	330 lm	2.64 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09SL30E_X	3000K	300 lm	2.64 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-09SL27E_X	2700K	285 lm	2.64 W	140	856 x 19.5 x 19.8 (mm)	163 g
	LB5D-10SL50E_X	5000K	375 lm	3.00 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10SL40E_X	4000K	375 lm	3.00 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10SL30E_X	3000K	340 lm	3.00 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-10SL27E_X	2700K	325 lm	3.00 W	140	978 x 19.5 x 19.8 (mm)	194 g
	LB5D-12SL50E_X	5000K	440 lm	3.52 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12SL40E_X	4000K	440 lm	3.52 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12SL30E_X	3000K	400 lm	3.52 W	140	1140 x 19.5 x 19.8 (mm)	215 g
	LB5D-12SL27E_X	2700K	380 lm	3.52 W	140	1140 x 19.5 x 19.8 (mm)	215 g

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
High Flux (13.13 W/m)	LB5DF10-01H50E_X	5000K	10pcs	1110 lm	10.90 W	140	840 x 19.5 x 19.8 /10pcs (mm)	250 g
	LB5DF10-01H40E_X	4000K	10pcs	1110 lm	10.90 W	140	[84 x 19.5 x 19.8 /pcs(mm)]	
	LB5DF10-01H30E_X	3000K	10pcs	1040 lm	10.90 W	140		
	LB5DF10-01H27E_X	2700K	10pcs	990 lm	10.90 W	140		

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Low Flux (8.97 W/m)	LB5DF10-01L50E_X	5000K	10pcs	790 lm	7.50 W	140	840 x 19.5 x 19.8 /10pcs (mm)	250 g
	LB5DF10-01L40E_X	4000K	10pcs	790 lm	7.50 W	140	[84 x 19.5 x 19.8 /pcs(mm)]	
	LB5DF10-01L30E_X	3000K	10pcs	730 lm	7.50 W	140		
	LB5DF10-01L27E_X	2700K	10pcs	700 lm	7.50 W	140		

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Mid Low Flux (7.50 W/m)	LB5DF10-01ML50E_X	5000K	10pcs	675 lm	6.30 W	140	840 x 19.5 x 19.8 /10pcs (mm)	250 g
	LB5DF10-01ML40E_X	4000K	10pcs	675 lm	6.30 W	140	[84 x 19.5 x 19.8 /pcs(mm)]	
	LB5DF10-01ML30E_X	3000K	10pcs	620 lm	6.30 W	140		
	LB5DF10-01ML27E_X	2700K	10pcs	605 lm	6.30 W	140		

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Very Low Flux (6.00 W/m)	LB5DF10-01VL50E_X	5000K	10pcs	560 lm	5.00 W	140	840 x 19.5 x 19.8 /10pcs (mm)	250 g
	LB5DF10-01VL40E_X	4000K	10pcs	560 lm	5.00 W	140	[84 x 19.5 x 19.8 /pcs(mm)]	
	LB5DF10-01VL30E_X	3000K	10pcs	515 lm	5.00 W	140		
	LB5DF10-01VL27E_X	2700K	10pcs	480 lm	5.00 W	140		

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Ultra Low Flux (4.50 W/m)	LB5DF10-01UL50E_X	5000K	10pcs	430 lm	3.80 W	140	840 x 19.5 x 19.8 /10pcs (mm)	250 g
	LB5DF10-01UL40E_X	4000K	10pcs	430 lm	3.80 W	140	[84 x 19.5 x 19.8 /pcs(mm)]	
	LB5DF10-01UL30E_X	3000K	10pcs	395 lm	3.80 W	140		
	LB5DF10-01UL27E_X	2700K	10pcs	380 lm	3.80 W	140		

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Super Low Flux (3.00 W/m)	LB5DF10-01SL50E_X	5000K	10pcs	305 lm	2.50 W	140	840 x 19.5 x 19.8 /10pcs (mm)	250 g
	LB5DF10-01SL40E_X	4000K	10pcs	305 lm	2.50 W	140	[84 x 19.5 x 19.8 /pcs(mm)]	
	LB5DF10-01SL30E_X	3000K	10pcs	280 lm	2.50 W	140		
	LB5DF10-01SL27E_X	2700K	10pcs	270 lm	2.50 W	140		