

LB5/LB5F

ラスタービーム V / ラスタービーム V FLEX



- Ideal for indirect and under-shelf lighting
- Monochromatic dimming possible
- Wiring can be stored inside the metal clip H
- FLEX for curved indirect lighting
- Easy connection with connectors



Connectors



Clip H Stowable inside



FLEX Image



BASIC SPECIFICATION

PART NO.

LB5F10-01HOOE

LB5-△△HOOE

○ Standard ● Customize

12 : 4ft (1140mm) ○
 10 : 1m (977mm) ●
 09 : 3ft (856mm) ○
 06 : 2ft (571mm) ○
 03 : 1ft (287mm) ○

65 : 6500K ●
 50 : 5000K ○
 40 : 4000K ○
 35 : 3500K ●
 30 : 3000K ○
 27 : 2700K ●

INPUT VOLTAGE DC24V

COLOR TEMPERATURE 2700K 3000K 4000K 5000K 6500K

AVERAGE CRI >Ra90

POWER CONSUMPTION 15.32W / 11.49W / 7.66W / 3.83W / 12.80W

BEAM ANGLE 115°

LEVEL OF PROTECTION IP20 (Indoor)

OPERATION TEMP./HUM. -20°C ~ +50°C / 20°C ~ 85%RH


STORAGE TEMPERATURE -20°C ~ +70°C

LIST OF AVAILABLE PRODUCTION LENGTHS


PART NO. :	LENGTH	POWER	Standard	Customize
01	: 98 mm	1.28W		
02	: 192 mm	2.55W		
03	: 287 mm	3.83W		1ft
04	: 382 mm	5.11W		
05	: 477 mm	6.39W		2ft
06	: 571 mm	7.66W		
07	: 666 mm	8.94W		
08	: 761 mm	10.22W		
09	: 856 mm	11.49W		3ft
10	: 951 mm	12.77W		
11	: 1045 mm	14.05W		
12	: 1140 mm	15.32W		4ft

※ In addition to the above, it is possible to change the product length and number of connections for FLEX and product of lengths 4ft and over.
Please enquire for details.


※ Please enquire about suggested retail prices for custom-made colour temperatures.

LB5-△△H65E
6500K


1600 / 1200 / 800 / 400 / 1335 lm

LB5-△△H50E
5000K


1620 / 1215 / 810 / 405 / 1350 lm

LB5-△△H40E
4000K


1620 / 1215 / 810 / 405 / 1350 lm

LB5-△△H35E
3500K

1580 / 1185 / 790 / 395 / 1300 lm

LB5-△△H30E
3000K

1520 / 1140 / 760 / 380 / 1270 lm


LB5-△△H27E
2700K


1440 / 1080 / 720 / 360 / 1200 lm

※ Light distribution curve shown is for the 4ft model.

※ Luminous flux values are luminous flux of the fixture [4ft/3ft/2ft/1ft].

※ Grid 500 x 500 mm / Illuminating surface ≈ 3500 x 3000 mm

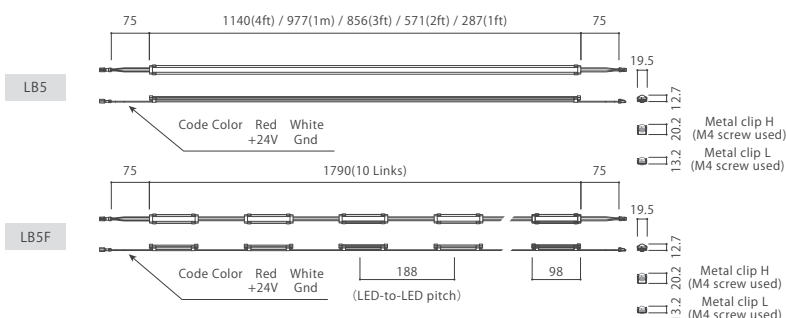

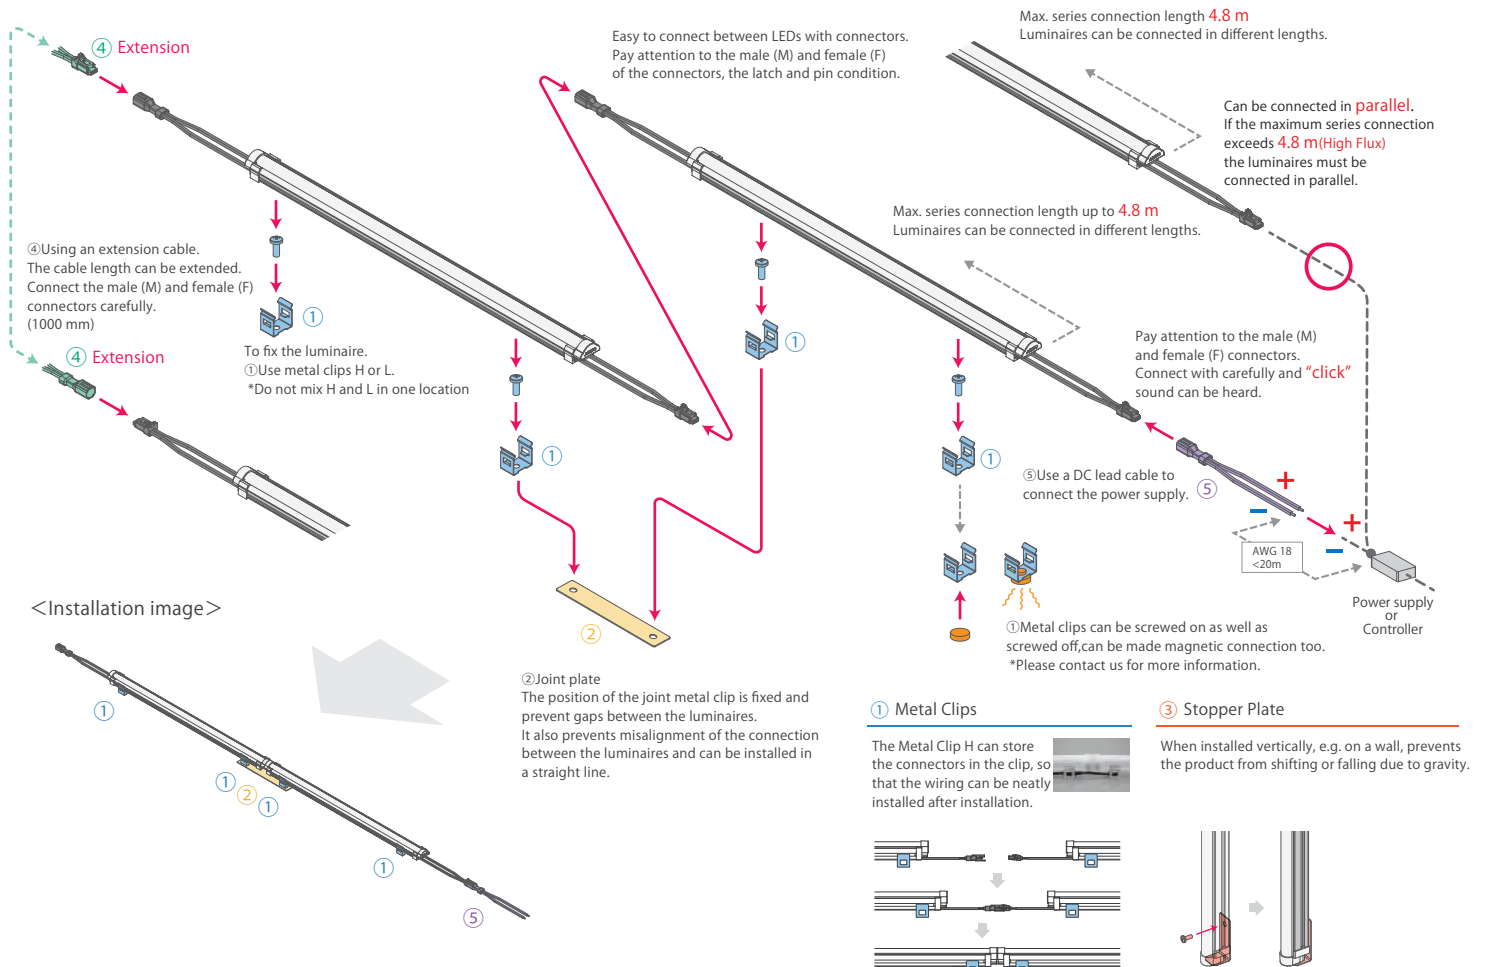

① Metal Clips

H : M421000-0015-01
L : M421000-0014



(For connector storage)
(L) x (W) x (H)
H Clip : 16.8 x 15.0 x 16.11 mm
L Clip : 16.4 x 15.0 x 7.7 mm

② Joint Plate

M417003-0140



(L) x (W)
80.0 x 15.4 mm

③ Stopper Plate

M417003-0141



(L) x (W) x (H)
41.0 x 15.4 x 17.0 mm


④ Extension Cable

1000mm : BWC-0000-0377A



⑤ DC Lead Cables

F : BWC-0000-0332 / BWC-0000-0332A
M : BWC-0000-0333B



※ F is either, depending on stock availability.
※ Maximum current ≤4A in one series connection.

DC Jack Cable

1500mm : BWC-0000-0571A




Dimmer



<Without dimming>



<0-10V / 1-10V dimming / PWM>



<0-10V / 1-10V dimming / PWM / DALI>

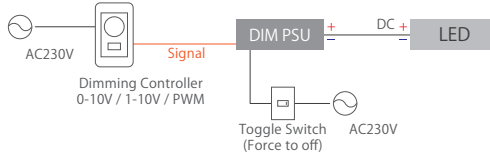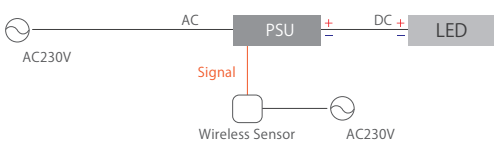

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
High Flux (12.77 W/m)	LB5-03H50E_X	5000K	415 lm	3.83 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03H40E_X	4000K	415 lm	3.83 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03H30E_X	3000K	390 lm	3.83 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03H27E_X	2700K	370 lm	3.83 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-06H50E_X	5000K	830 lm	7.66 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06H40E_X	4000K	830 lm	7.66 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06H30E_X	3000K	780 lm	7.66 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06H27E_X	2700K	740 lm	7.66 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-09H50E_X	5000K	1245 lm	11.49 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09H40E_X	4000K	1245 lm	11.49 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09H30E_X	3000K	1170 lm	11.49 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09H27E_X	2700K	1110 lm	11.49 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-10H50E_X	5000K	1385 lm	12.77 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10H40E_X	4000K	1385 lm	12.77 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10H30E_X	3000K	1365 lm	12.77 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10H27E_X	2700K	1295 lm	12.77 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-12H50E_X	5000K	1660 lm	15.32 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12H40E_X	4000K	1660 lm	15.32 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12H30E_X	3000K	1560 lm	15.32 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12H27E_X	2700K	1480 lm	15.32 W	115	1140 x 19.5 x 12.7 (mm)	189 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Low Flux (8.73W/m)	LB5-03L50E_X	5000K	290 lm	2.62 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03L40E_X	4000K	290 lm	2.62 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03L30E_X	3000K	275 lm	2.62 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03L27E_X	2700K	260 lm	2.62 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-06L50E_X	5000K	580 lm	5.24 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06L40E_X	4000K	580 lm	5.24 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06L30E_X	3000K	550 lm	5.24 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06L27E_X	2700K	520 lm	5.24 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-09L50E_X	5000K	870 lm	7.86 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09L40E_X	4000K	870 lm	7.86 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09L30E_X	3000K	825 lm	7.86 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09L27E_X	2700K	780 lm	7.86 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-10L50E_X	5000K	965 lm	8.73 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10L40E_X	4000K	965 lm	8.73 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10L30E_X	3000K	915 lm	8.73 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10L27E_X	2700K	870 lm	8.73 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-12L50E_X	5000K	1160 lm	10.48 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12L40E_X	4000K	1160 lm	10.48 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12L30E_X	3000K	1100 lm	10.48 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12L27E_X	2700K	1040 lm	10.48 W	115	1140 x 19.5 x 12.7 (mm)	189 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Mid Low Flux (7.50 W/m)	LB5-03ML50E_X	5000K	255 lm	2.25 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03ML0E_X	4000K	255 lm	2.25 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03ML30E_X	3000K	240 lm	2.25 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03ML27E_X	2700K	230 lm	2.25 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-06ML50E_X	5000K	510 lm	4.50 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06ML40E_X	4000K	510 lm	4.50 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06ML30E_X	3000K	480 lm	4.50 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06ML27E_X	2700K	460 lm	4.50 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-09ML50E_X	5000K	765 lm	6.75 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09ML40E_X	4000K	765 lm	6.75 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09ML30E_X	3000K	720 lm	6.75 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09ML27E_X	2700K	690 lm	6.75 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-10ML50E_X	5000K	850 lm	7.50 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10ML40E_X	4000K	850 lm	7.50 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10ML30E_X	3000K	800 lm	7.50 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10ML27E_X	2700K	765 lm	7.50 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-12ML50E_X	5000K	1020 lm	9.00 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12ML40E_X	4000K	1020 lm	9.00 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12ML30E_X	3000K	960 lm	9.00 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12ML27E_X	2700K	920 lm	9.00 W	115	1140 x 19.5 x 12.7 (mm)	189 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Very Low Flux (6.00 W/m)	LB5-03VL50E_X	5000K	210 lm	1.80 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03VL40E_X	4000K	210 lm	1.80 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03VL30E_X	3000K	200 lm	1.80 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03VL27E_X	2700K	190 lm	1.80 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-06VL50E_X	5000K	420 lm	3.60 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06VL40E_X	4000K	420 lm	3.60 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06VL30E_X	3000K	400 lm	3.60 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06VL27E_X	2700K	380 lm	3.60 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-09VL50E_X	5000K	630 lm	5.40 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09VL40E_X	4000K	630 lm	5.40 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09VL30E_X	3000K	600 lm	5.40 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09VL27E_X	2700K	570 lm	5.40 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-10VL50E_X	5000K	700 lm	6.00 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10VL40E_X	4000K	700 lm	6.00 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10VL30E_X	3000K	665 lm	6.00 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10VL27E_X	2700K	635 lm	6.00 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-12VL50E_X	5000K	840 lm	7.20 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12VL40E_X	4000K	840 lm	7.20 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12VL30E_X	3000K	800 lm	7.20 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12VL27E_X	2700K	760 lm	7.20 W	115	1140 x 19.5 x 12.7 (mm)	189 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Ultra Low Flux (4.50 W/m)	LB5-03UL50E_X	5000K	160 lm	1.35 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03UL40E_X	4000K	160 lm	1.35 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03UL30E_X	3000K	150 lm	1.35 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03UL27E_X	2700K	145 lm	1.35 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-06UL50E_X	5000K	320 lm	2.70 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06UL40E_X	4000K	320 lm	2.70 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06UL30E_X	3000K	300 lm	2.70 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06UL27E_X	2700K	290 lm	2.70 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-09UL50E_X	5000K	480 lm	4.05 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09UL40E_X	4000K	480 lm	4.05 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09UL30E_X	3000K	450 lm	4.05 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09UL27E_X	2700K	435 lm	4.05 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-10UL50E_X	5000K	535 lm	4.50 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10UL40E_X	4000K	535 lm	4.50 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10UL30E_X	3000K	500 lm	4.50 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10UL27E_X	2700K	480 lm	4.50 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-12UL50E_X	5000K	640 lm	5.40 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12UL40E_X	4000K	640 lm	5.40 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12UL30E_X	3000K	600 lm	5.40 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12UL27E_X	2700K	580 lm	5.40 W	115	1140 x 19.5 x 12.7 (mm)	189 g

	Model	CCT	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Super Low Flux (3.00 W/m)	LB5-03SL50E_X	5000K	115 lm	0.90 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03SL40E_X	4000K	115 lm	0.90 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03SL30E_X	3000K	105 lm	0.90 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-03SL27E_X	2700K	100 lm	0.90 W	115	287 x 19.5 x 12.7 (mm)	52 g
	LB5-06SL50E_X	5000K	230 lm	1.80 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06SL40E_X	4000K	230 lm	1.80 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06SL30E_X	3000K	210 lm	1.80 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-06SL27E_X	2700K	200 lm	1.80 W	115	571 x 19.5 x 12.7 (mm)	103 g
	LB5-09SL50E_X	5000K	345 lm	2.70 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09SL40E_X	4000K	345 lm	2.70 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09SL30E_X	3000K	315 lm	2.70 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-09SL27E_X	2700K	300 lm	2.70 W	115	856 x 19.5 x 12.7 (mm)	149 g
	LB5-10SL50E_X	5000K	385 lm	3.00 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10SL40E_X	4000K	385 lm	3.00 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10SL30E_X	3000K	350 lm	3.00 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-10SL27E_X	2700K	335 lm	3.00 W	115	951 x 19.5 x 12.7 (mm)	172 g
	LB5-12SL50E_X	5000K	460 lm	3.60 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12SL40E_X	4000K	460 lm	3.60 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12SL30E_X	3000K	420 lm	3.60 W	115	1140 x 19.5 x 12.7 (mm)	189 g
	LB5-12SL27E_X	2700K	400 lm	3.60 W	115	1140 x 19.5 x 12.7 (mm)	189 g

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
High Flux (12.77 W/m)	LB5F10-01H50E_X	5000K	10pcs	1350 lm	12.77 W	115	980 x 19.5 x 12.7 /10pcs (mm) [98 x 19.5 x 12.7 /pcs(mm)]	182 g
	LB5F10-01H40E_X	4000K	10pcs	1350 lm	12.77 W	115		
	LB5F10-01H30E_X	3000K	10pcs	1270 lm	12.77 W	115		
	LB5F10-01H27E_X	2700K	10pcs	1200 lm	12.77 W	115		
	LB5F05-02H50E_X	5000K	5pcs	1350 lm	12.77 W	115	960 x 19.5 x 12.7 /5pcs (mm) [192 x 19.5 x 12.7 /pcs(mm)]	178 g
	LB5F05-02H40E_X	4000K	5pcs	1350 lm	12.77 W	115		
	LB5F05-02H30E_X	3000K	5pcs	1270 lm	12.77 W	115		
	LB5F05-02H27E_X	2700K	5pcs	1200 lm	12.77 W	115		

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Low Flux (8.93 W/m)	LB5F10-01L50E_X	5000K	10pcs	950 lm	8.93 W	115	980 x 19.5 x 12.7 /10pcs (mm) [98 x 19.5 x 12.7 /pcs(mm)]	182 g
	LB5F10-01L40E_X	4000K	10pcs	950 lm	8.93 W	115		
	LB5F10-01L30E_X	3000K	10pcs	900 lm	8.93 W	115		
	LB5F10-01L27E_X	2700K	10pcs	850 lm	8.93 W	115		
	LB5F05-02L50E_X	5000K	5pcs	950 lm	8.93 W	115	960 x 19.5 x 12.7 /5pcs (mm) [192 x 19.5 x 12.7 /pcs(mm)]	178 g
	LB5F05-02L40E_X	4000K	5pcs	950 lm	8.93 W	115		
	LB5F05-02L30E_X	3000K	5pcs	900 lm	8.93 W	115		
	LB5F05-02L27E_X	2700K	5pcs	850 lm	8.93 W	115		

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Mid Low Flux (7.50 W/m)	LB5F10-01ML50E_X	5000K	10pcs	840 lm	7.50 W	115	980 x 19.5 x 12.7 /10pcs (mm) [98 x 19.5 x 12.7 /pcs(mm)]	182 g
	LB5F10-01ML40E_X	4000K	10pcs	840 lm	7.50 W	115		
	LB5F10-01ML30E_X	3000K	10pcs	790 lm	7.50 W	115		
	LB5F10-01ML27E_X	2700K	10pcs	760 lm	7.50 W	115		
	LB5F05-01ML50E_X	5000K	5pcs	840 lm	7.50 W	115	960 x 19.5 x 12.7 /5pcs (mm) [192 x 19.5 x 12.7 /pcs(mm)]	178 g
	LB5F05-01ML40E_X	4000K	5pcs	840 lm	7.50 W	115		
	LB5F05-01ML30E_X	3000K	5pcs	790 lm	7.50 W	115		
	LB5F05-01ML27E_X	2700K	5pcs	760 lm	7.50 W	115		

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Very Low Flux (6.00 W/m)	LB5F10-01VL50E_X	5000K	10pcs	690 lm	6.00 W	115	980 x 19.5 x 12.7 /10pcs (mm) [98 x 19.5 x 12.7 /pcs(mm)]	182 g
	LB5F10-01 VL40E_X	4000K	10pcs	690 lm	6.00 W	115		
	LB5F10-01VL30E_X	3000K	10pcs	650 lm	6.00 W	115		
	LB5F10-01VL27E_X	2700K	10pcs	620 lm	6.00 W	115		
	LB5F05-02VL50E_X	5000K	5pcs	690 lm	6.00 W	115	960 x 19.5 x 12.7 /5pcs (mm) [192 x 19.5 x 12.7 /pcs(mm)]	178 g
	LB5F05-02VL40E_X	4000K	5pcs	690 lm	6.00 W	115		
	LB5F05-02VL30E_X	3000K	5pcs	650 lm	6.00 W	115		
	LB5F05-02VL27E_X	2700K	5pcs	620 lm	6.00 W	115		

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Ultra Low Flux (4.50 W/m)	LB5F10-01UL50E_X	5000K	10pcs	520 lm	4.50 W	115	980 x 19.5 x 12.7 /10pcs (mm)	182 g
	LB5F10-01UL40E_X	4000K	10pcs	520 lm	4.50 W	115	[98 x 19.5 x 12.7 /pcs(mm)]	
	LB5F10-01UL30E_X	3000K	10pcs	490 lm	4.50 W	115		
	LB5F10-01UL27E_X	2700K	10pcs	470 lm	4.50 W	115		
	LB5F05-02UL50E_X	5000K	5pcs	520 lm	4.50 W	115	960 x 19.5 x 12.7 /5pcs (mm)	178 g
	LB5F05-02UL40E_X	4000K	5pcs	520 lm	4.50 W	115	[192 x 19.5 x 12.7 /pcs(mm)]	
	LB5F05-02UL30E_X	3000K	5pcs	490 lm	4.50 W	115		
	LB5F05-02UL27E_X	2700K	5pcs	470 lm	4.50 W	115		

	Model	CCT	Qty per chain	Lumen	Rated Power	Beam Angle	Size (L x W x H)	Weight
Super Low Flux (3.00 W/m)	LB5F10-01SL50E_X	5000K	10pcs	370 lm	3.00 W	115	980 x 19.5 x 12.7 /10pcs (mm)	182 g
	LB5F10-01SL40E_X	4000K	10pcs	370 lm	3.00 W	115	[98 x 19.5 x 12.7 /pcs(mm)]	
	LB5F10-01SL30E_X	3000K	10pcs	330 lm	3.00 W	115		
	LB5F10-01SL27E_X	2700K	10pcs	320 lm	3.00 W	115		
	LB5F05-02SL50E_X	5000K	5pcs	370 lm	3.00 W	115	960 x 19.5 x 12.7 /5pcs (mm)	178 g
	LB5F05-02SL40E_X	4000K	5pcs	370 lm	3.00 W	115	[192 x 19.5 x 12.7 /pcs(mm)]	
	LB5F05-02SL30E_X	3000K	5pcs	330 lm	3.00 W	115		
	LB5F05-02SL27E_X	2700K	5pcs	320 lm	3.00 W	115		